

*Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range*

Bi-Conical Antenna Data Sheet

RM-BCA3040-2

Descriptions

RF MISO's **Model RM-BCA3040-4** is a vertical linear polarizatoin that operates from 30 to 40 GHz, The antenna offers Gain 4dBi Typ. The antenna RF ports are 2.92mm-F connector. The antenna can be widely used in EMI detection, orientation, reconnaissance, antenna gain and pattern measurement and other application fields.

Specifcaions


RM-BCA3040-4			
Parameters	Typical		Units
Frequency Range	30-40		GHz
Gain	4 Typ.		dBi
VSWR	1.7 Typ.		
Polarization	Vertical Linear Polarizatoin		
3dB BeamWidth	21.02~34.10		°
Connector	2.92mm-Female		
Material	Al		
Finishing	Paint		
Size(L*W*H)	Ø46*30.4(±5)		mm
Weight	0.043		kg
Power Handling	CW: 20	Peak: 40	W

Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range

Bi-Conical Antenna Data Sheet

RM-BCA3040-2

Outline Drawing

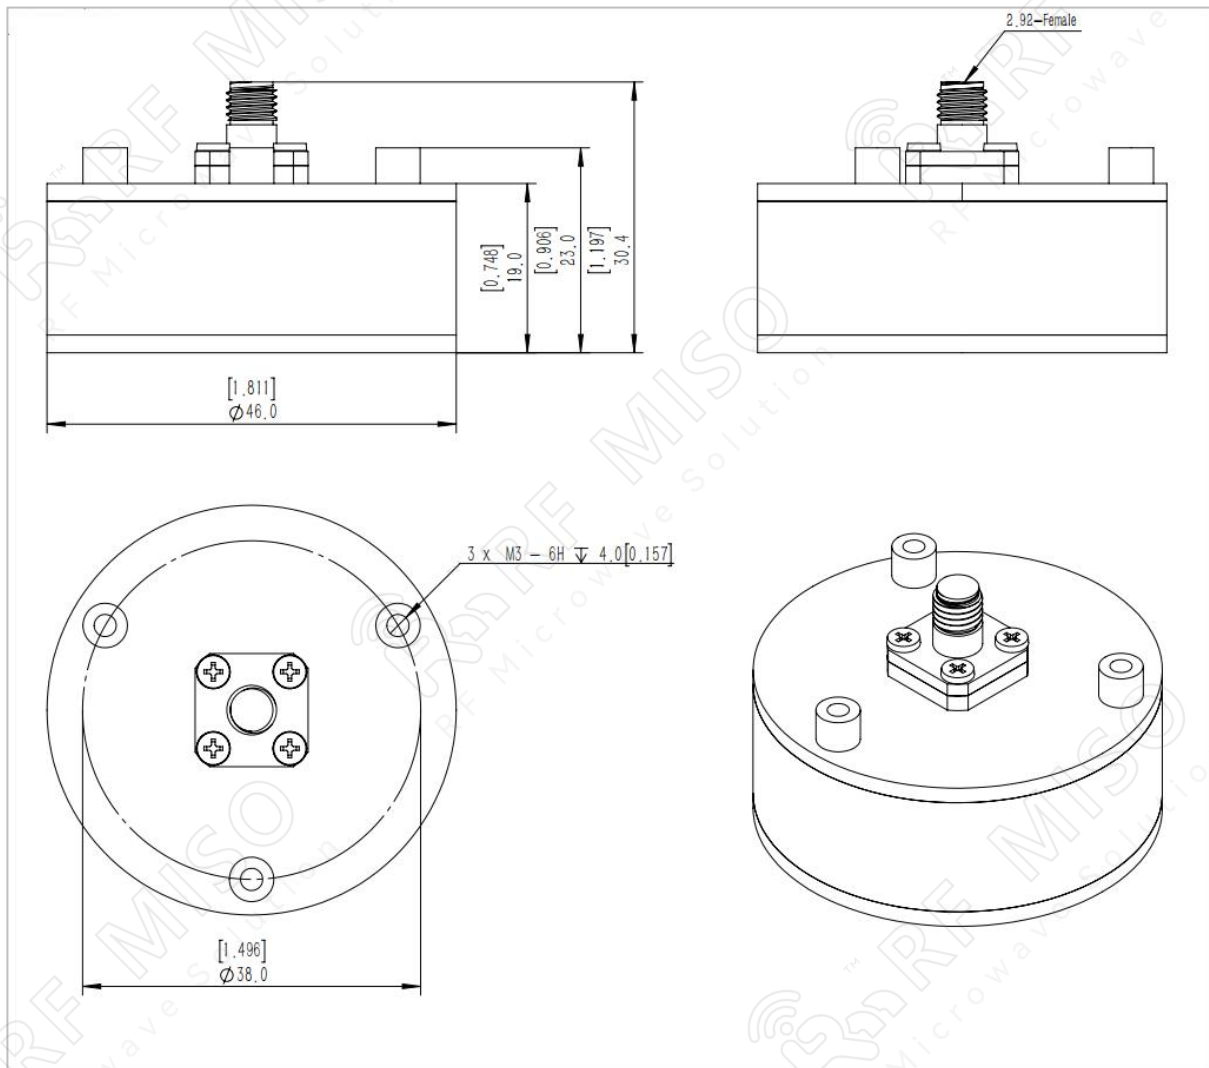


Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range

Bi-Conical Antenna Data Sheet


RM-BCA3040-2

Simulation Data

Gain

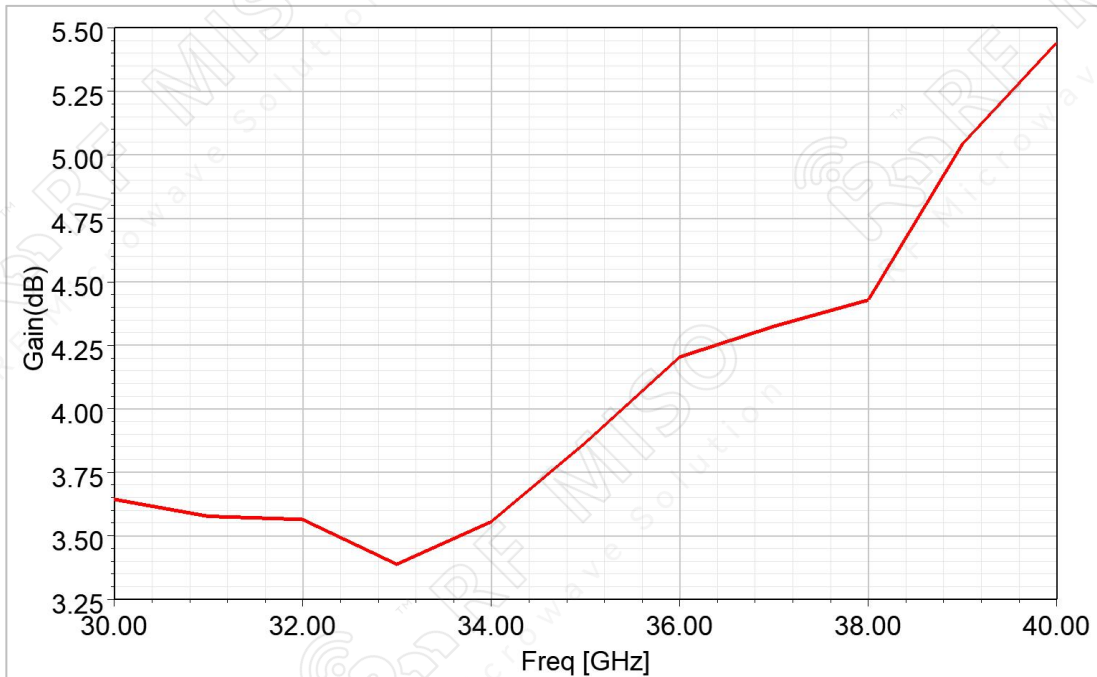

VSWR

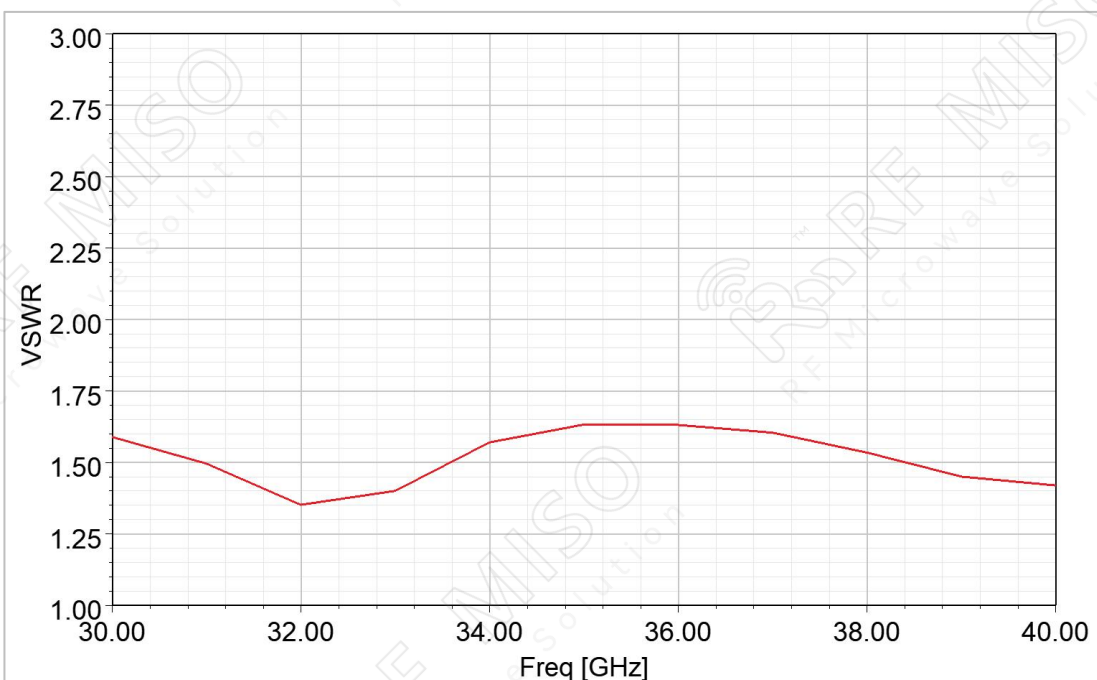


*Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range*


Bi-Conical Antenna Data Sheet

RM-BCA3040-2

Pattern

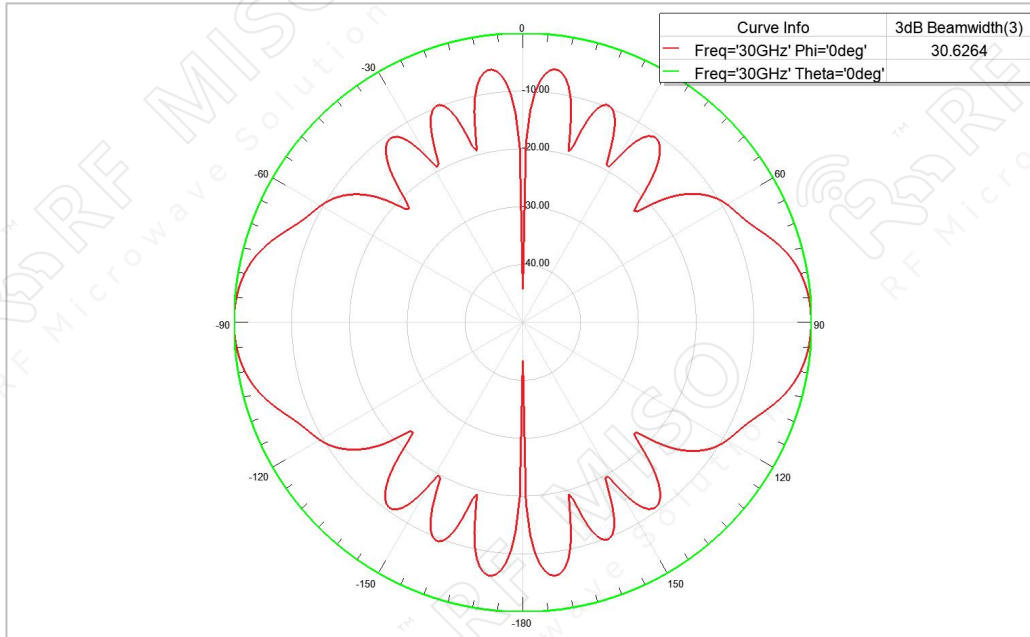

30 GHz

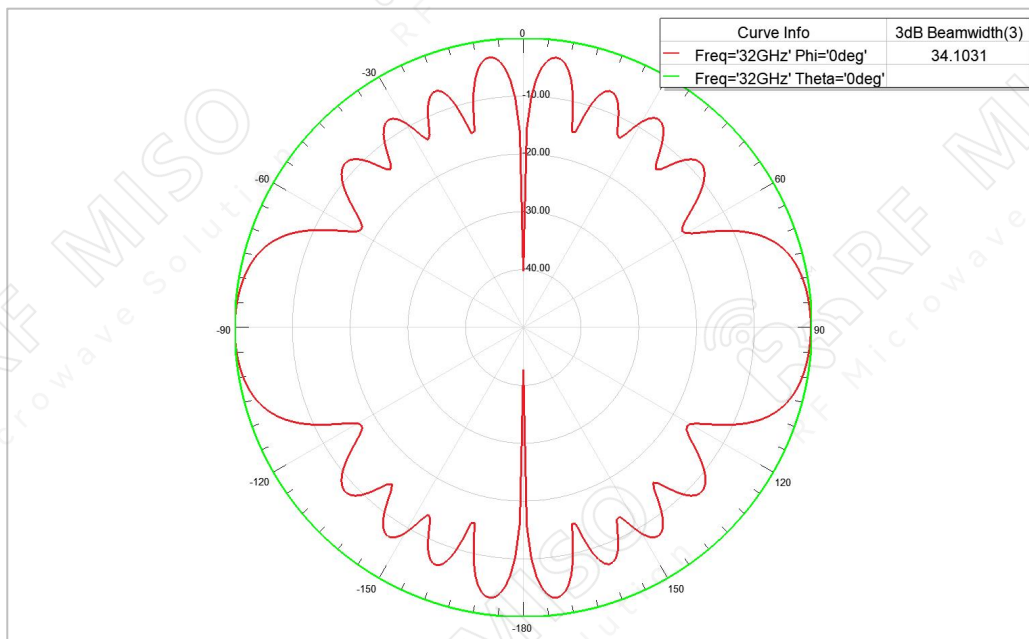


32 GHz


*Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range*

Bi-Conical Antenna Data Sheet

RM-BCA3040-2

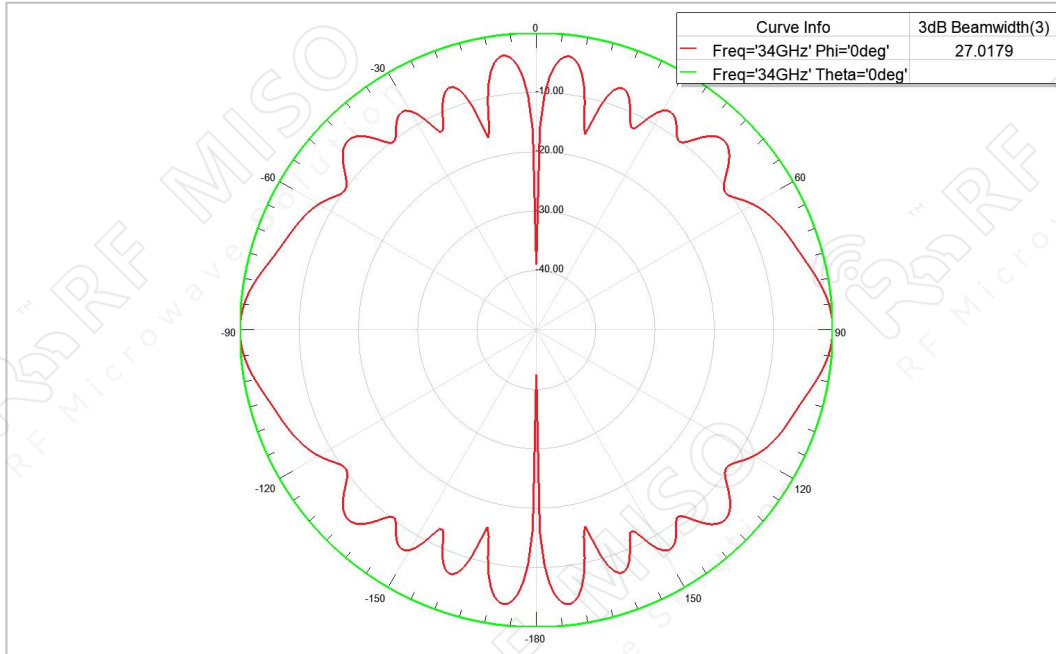

34 GHz

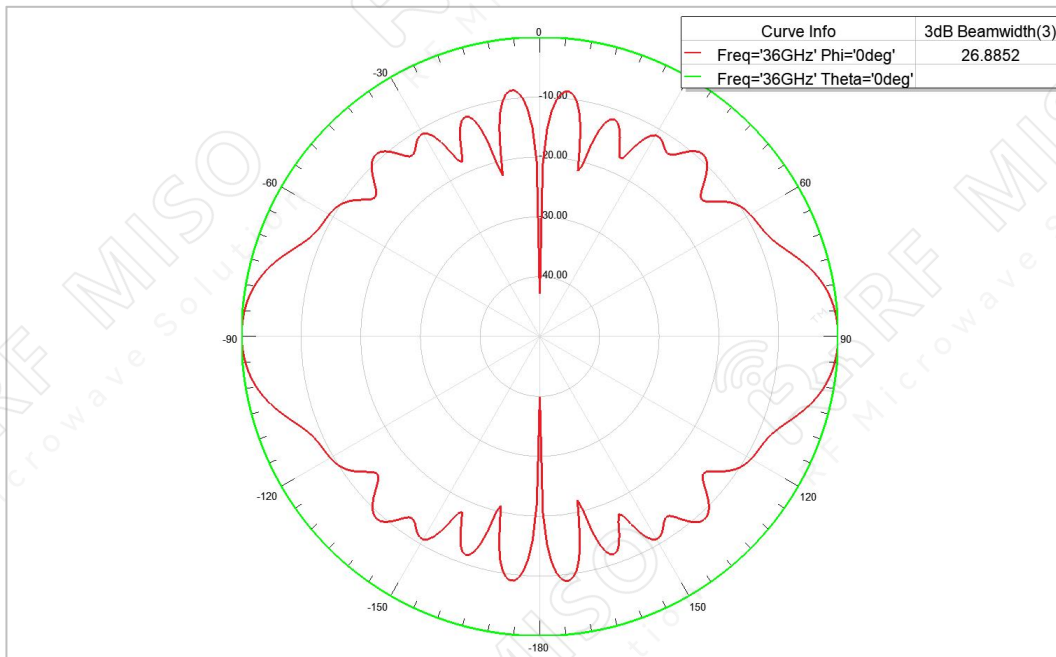


36 GHz


Bi-Conical Antenna 4 dBi Typ. Gain, 30-40 GHz
Frequency Range

Bi-Conical Antenna Data Sheet

RM-BCA3040-2

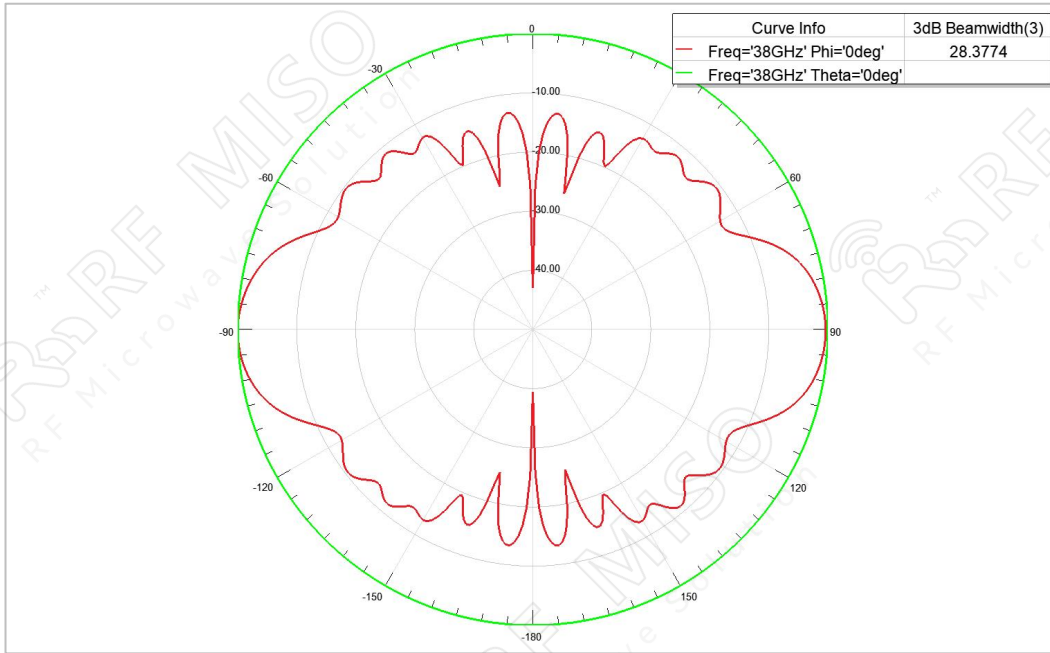

38 GHz

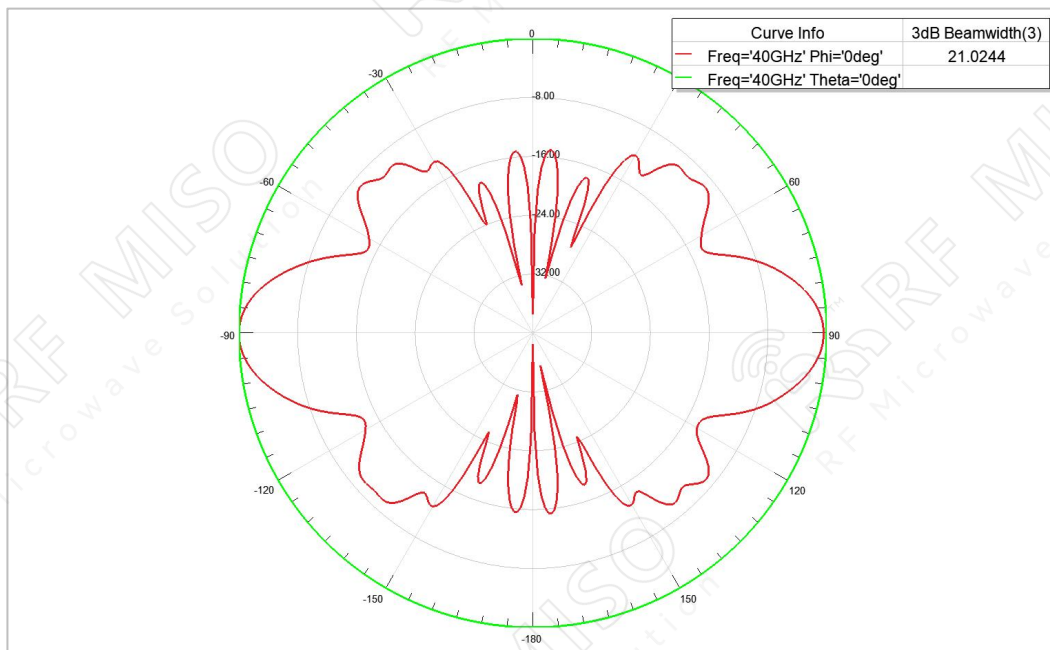

40 GHz