


*Biconical Antenna 3-40 GHz Frequency Range  
2 dBi Typ. Gain, Slant polarization*



## Biconical Antenna Data Sheet

**RM-BCA340-2**


### Descriptions

RF MISO's **Model RM-BCA340-2** is a slant polarization biconical antenna that operates from 3-40GHz. The antenna offers a gain 2 dBi Typ. and low VSWR 1.5:1 with 2.92-Female connector. The use of foam covers between the outer polarization layers can effectively reduce the wind resistance on the antenna surface, especially in outdoor applications, and improve the mechanical stability of the antenna.

### Specifications

RM-BCA340-2		
Parameters	Typical	Units
Frequency Range	3-40	GHz
Gain	2 Typ.	dBi
VSWR	1.5 Typ.	
Polarization	45° slant	
Connector	2.92-Female	
Body Material	Al	
Size	Φ83*96	mm
Weight	0.835	Kg
Power Handling,CW	50	W
Power Handling,Peak	100	W


Biconical Antenna 3-40 GHz Frequency Range  
2 dBi Typ. Gain, Slant polarization



## Biconical Antenna Data Sheet


RM-BCA340-2

### Outline Drawing

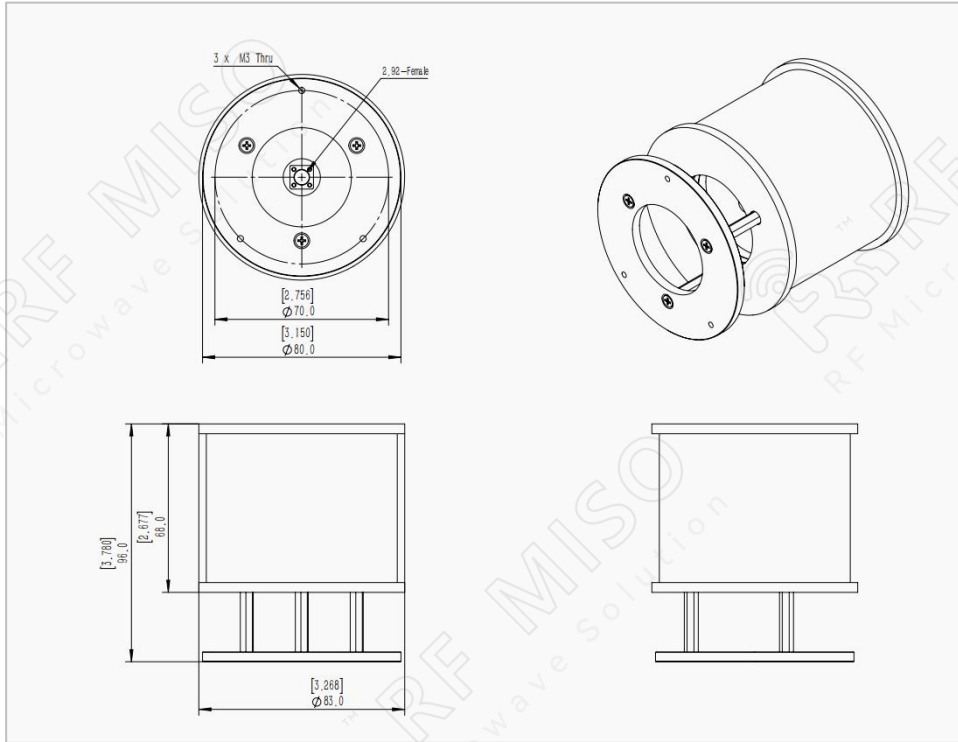


### Simulation Data

#### VSWR

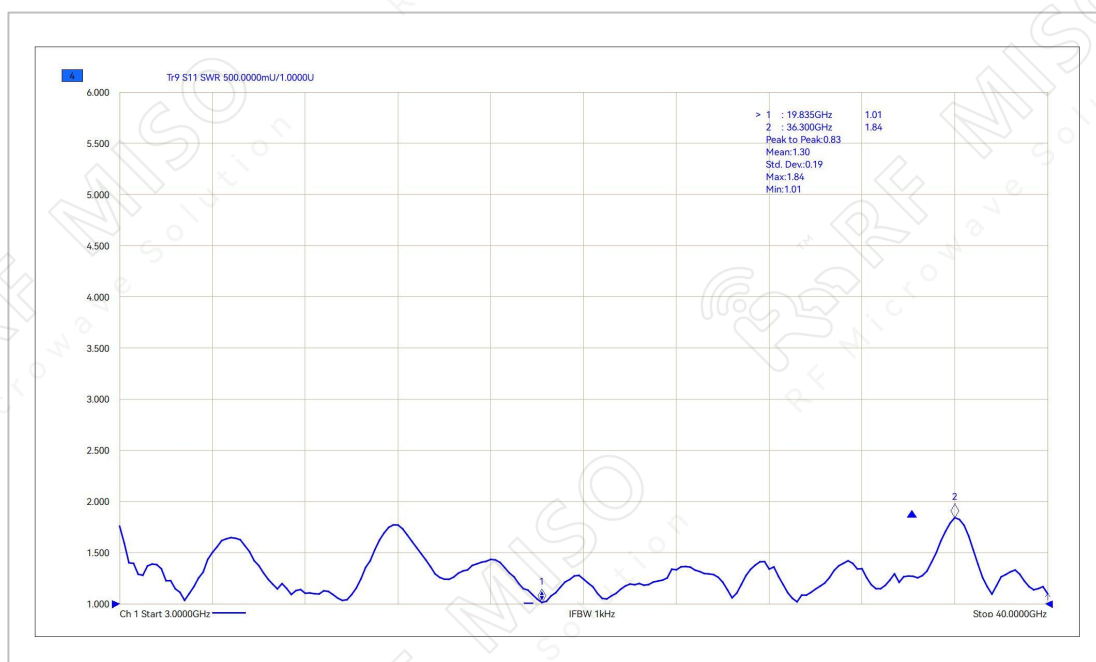


Biconical Antenna 3-40 GHz Frequency Range  
2 dBi Typ. Gain, Slant polarization



**Biconical Antenna Data Sheet**


**RM-BCA340-2**

Gain

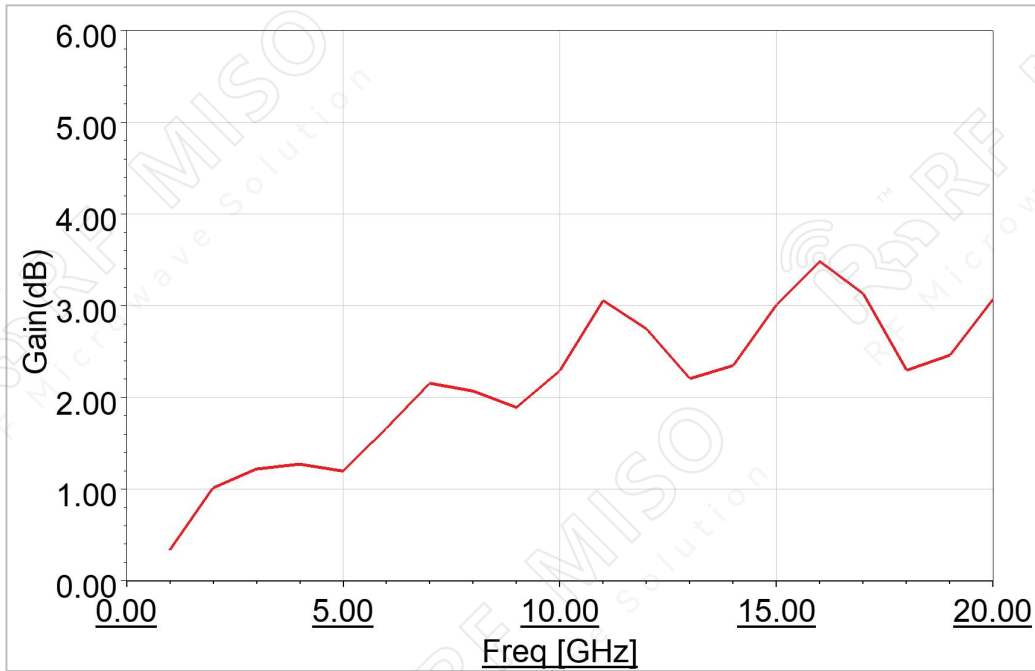


Pattern

5GHz

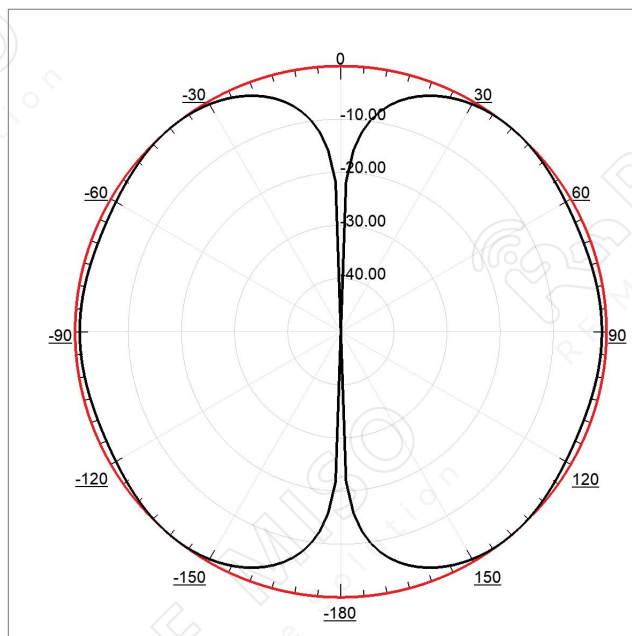


*Biconical Antenna 3-40 GHz Frequency Range  
2 dBi Typ. Gain, Slant polarization*



**Biconical Antenna Data Sheet**

**RM-BCA340-2**

15GHz

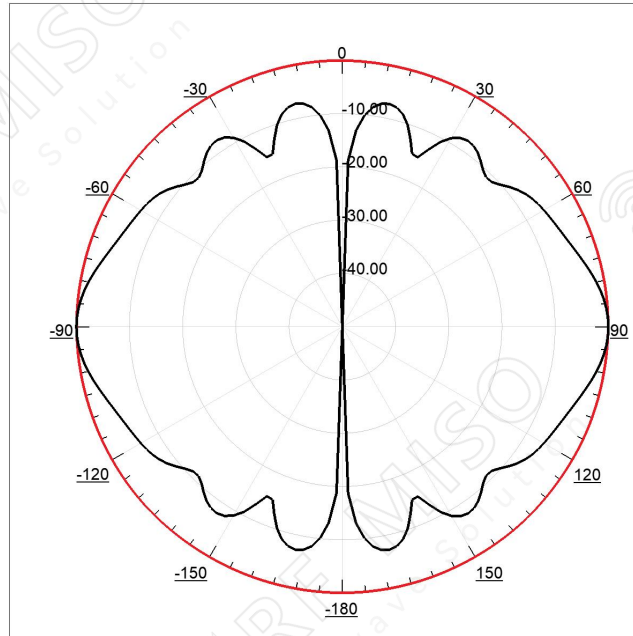

25GHz

