

Right-Hand Circular Polarization Planar Spiral Antenna
4 dBi Typ. Gain, 0.5-6 GHz Frequency Range

Planar Spiral Antenna Data Sheet

RM-PSA056-4

Descriptions

RF MISO's **Model RM-PSA056-4** is a right-hand circular planar spiral antenna that operates from 0.5-6 GHz. The antenna offers a gain 4 dBi Typ. and low VSWR 1.5:1 Typ. with N-female connector. It designed for EMC, reconnaissance, orientation, remote sensing, and flush mounted vehicle applications. These helical antennas can be used as separate antenna components or as feeders for reflector satellite antennas.

Specifications


RM-PSA056-4		
Parameters	Typical	Units
Frequency Range	0.5-6	GHz
Gain	4 Typ.	dBi
VSWR	1.5 Typ.	
AR	0.4 Typ.	dB
Polarization	R-H Circular Polarization	
Connector	N-Female	
Material	Al	
Finishing	Paint Black	
Size(L*W*H)	Ø160*79.5(±5)	mm
Weight	0.876	kg
Antenna Cover	Yes	
Waterproof	Yes	

Right-Hand Circular Polarization Planar Spiral Antenna
4 dBi Typ. Gain, 0.5-6 GHz Frequency Range

Planar Spiral Antenna Data Sheet


RM-PSA056-4

Outline Drawing

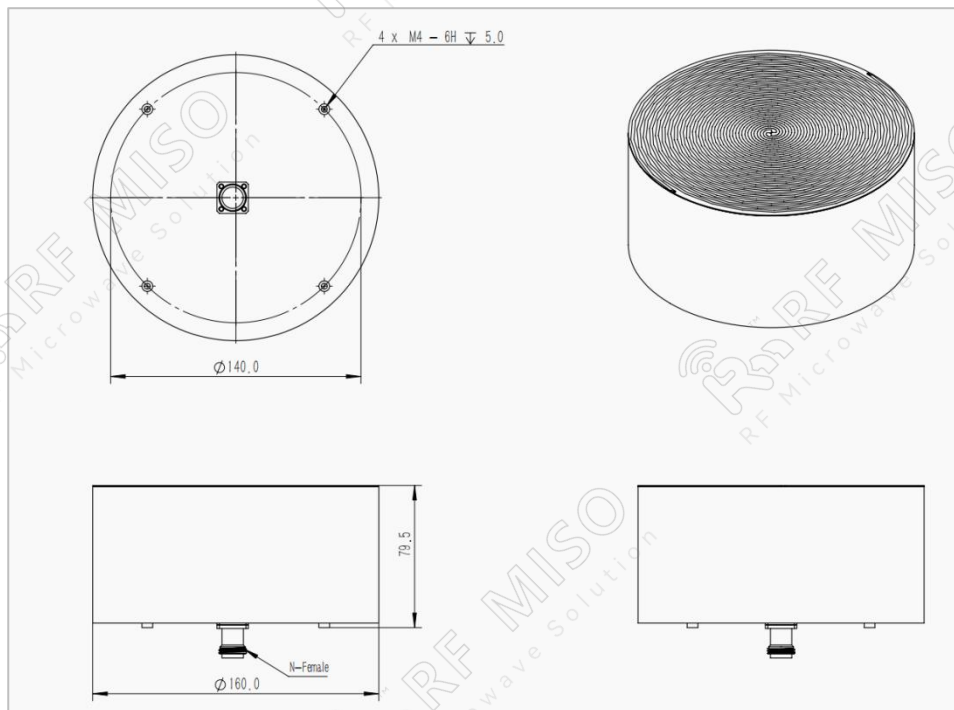

Simulation Data

VSWR

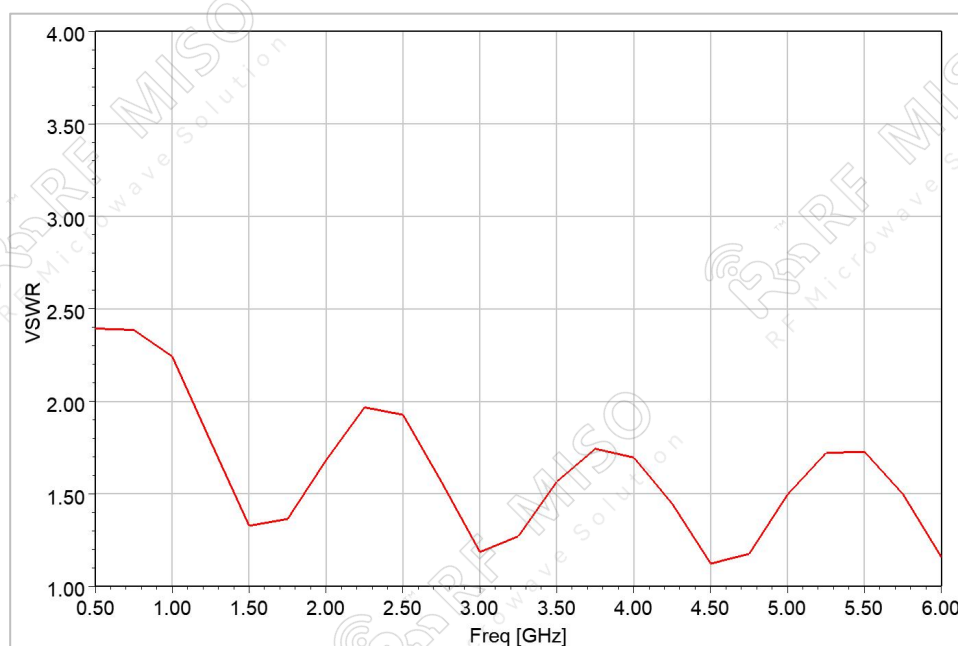


Right-Hand Circular Polarization Planar Spiral Antenna
4 dBi Typ. Gain, 0.5-6 GHz Frequency Range


Planar Spiral Antenna Data Sheet

RM-PSA056-4

Gain

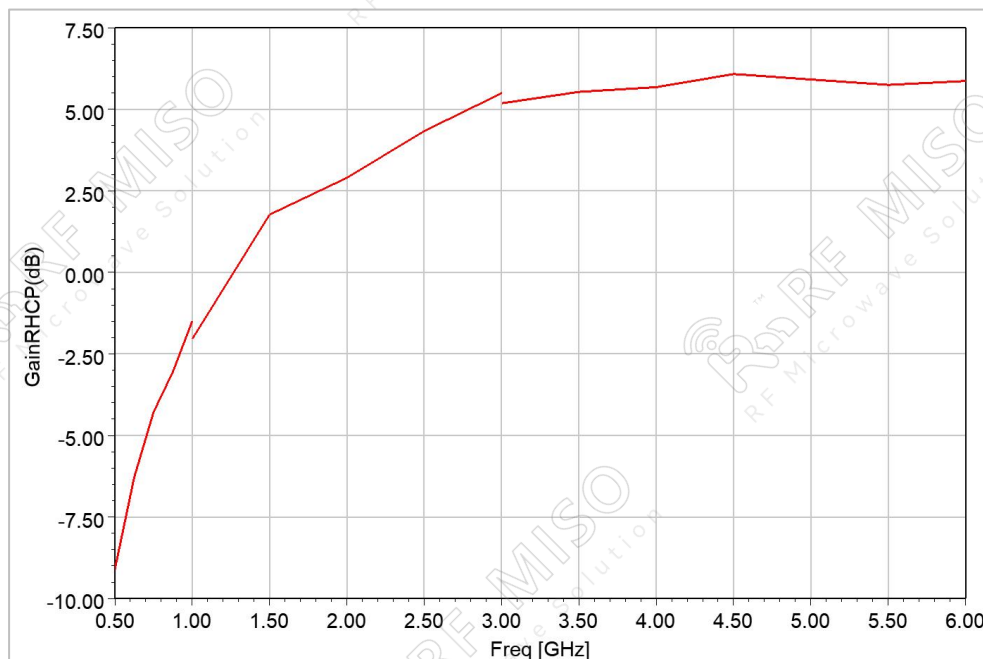

XPD

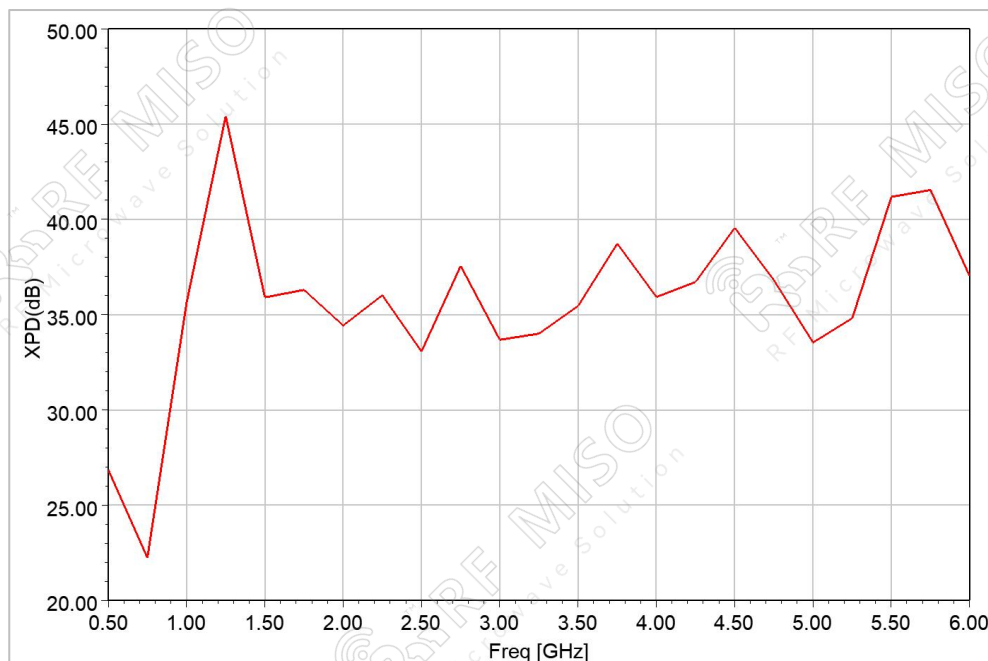

Right-Hand Circular Polarization Planar Spiral Antenna
4 dBi Typ. Gain, 0.5-6 GHz Frequency Range

Planar Spiral Antenna Data Sheet

RM-PSA056-4

Pattern

