

Standard Gain Horn Antenna
15dBi Typ. Gain, 21.7-33 GHz Frequency Range



Standard Gain Horn Antenna Data Sheet

RM-SGHA34-15

Features

- Wave-guide and Connector Interface
- Low Side-lobe
- Linear Polarization
- High Return Loss

Descriptions

RF MISO's **Model RM-SGHA34-15** is a linear polarized standard gain horn antenna that operates from 21.7 to 33 GHz. The antenna offers a typical gain of 15 dBi and low VSWR 1.3:1. The antenna has a typical 3dB beamwidth of 32 degrees on the E plane and 31 degrees on H plane. This antenna has flange input and coaxial input for customers to rotate. Antenna mounting brackets include ordinary L/I-type mounting bracket and rotating L-type bracket①

Specifications

Parameters	Specification		Unit
Frequency Range	21.7-33		GHz
Wave-guide	WR34		
Gain	15 Typ.		dBi
VSWR	1.3 Typ.		
Polarization	Linear		
3 dB Beamwidth, E-Plane	32° Typ.		
3 dB Beamwidth, H-Plane	31° Typ.		
Interface	FBP260(F Type)	2.4-Female(C Type)	
Material	Al		
Finishing	Paint		
C Type Size (L*W*H)	60.1*26.5*27.3 (±5)		mm
Weight	0.015(F Type)	0.027(C Type)	kg
C Type Average Power	50		W
C Type Peak Power	3000		W
Operating Temperature	-40° ~+85°		° C


Standard Gain Horn Antenna
15dBi Typ. Gain, 21.7-33 GHz Frequency Range



Standard Gain Horn Antenna Data Sheet


RM-SGHA34-15

F-Type Mechanical Drawing (P/N: RM-SGHA34-15F)

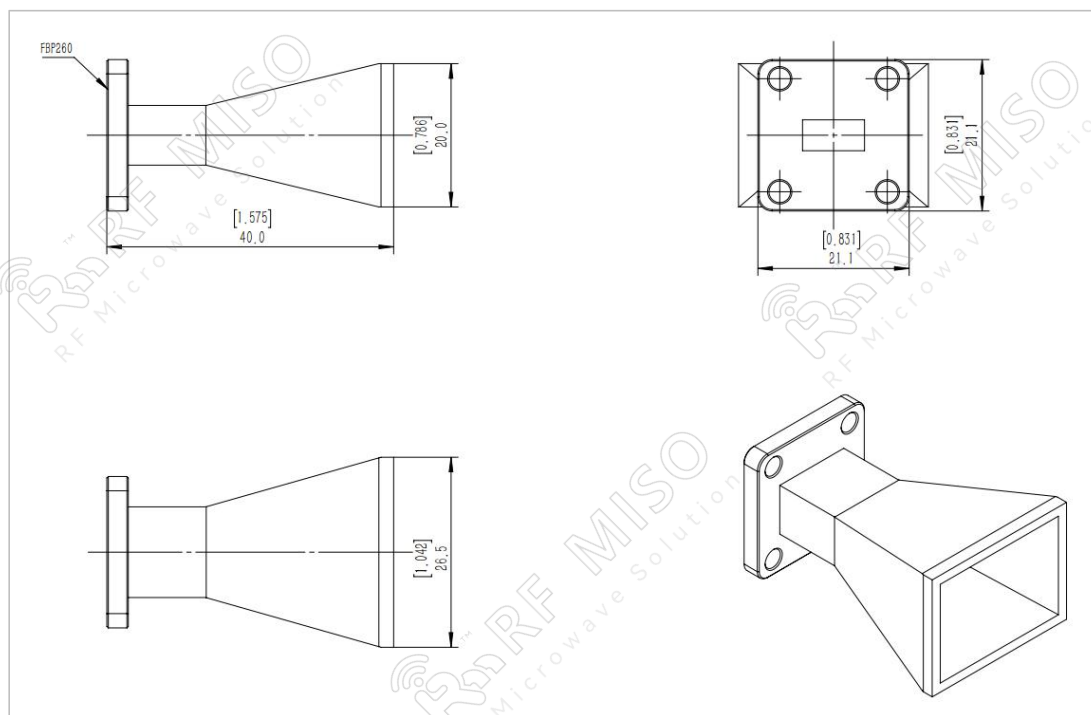

C-Type Mechanical Drawing (P/N: RM-SGHA34-15C)

SMA connector is available, please contact RF Miso.

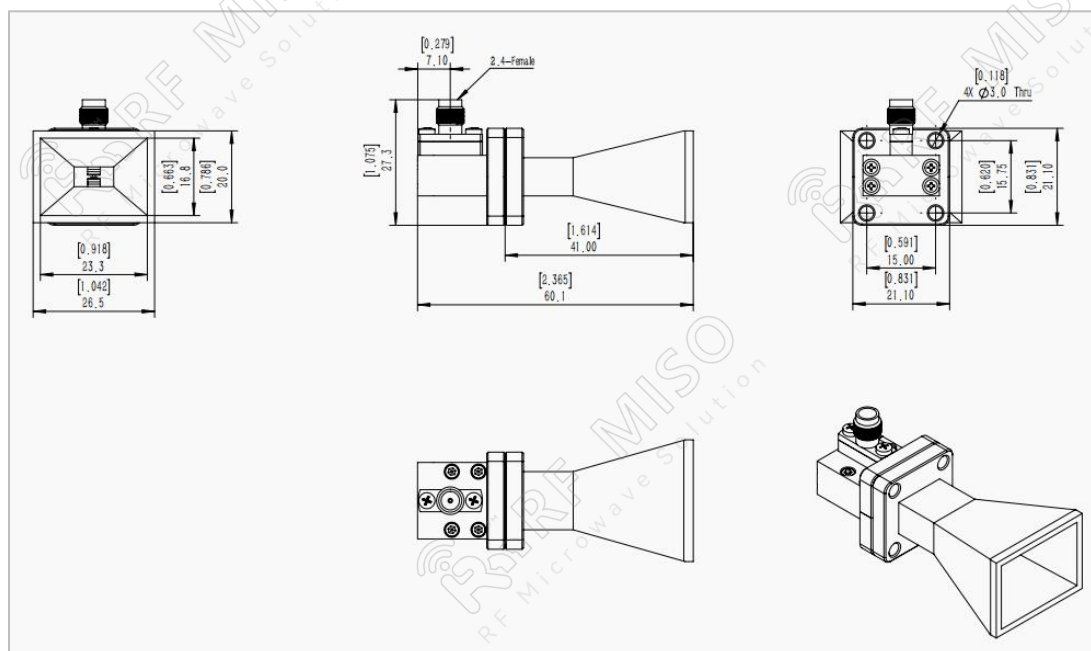


Standard Gain Horn Antenna
15dBi Typ. Gain, 21.7-33 GHz Frequency Range




Standard Gain Horn Antenna Data Sheet

RM-SGHA34-15

Mechanical Drawing with Original L-type Mounting Bracket (P/N: RM-SGHA34-15CL)

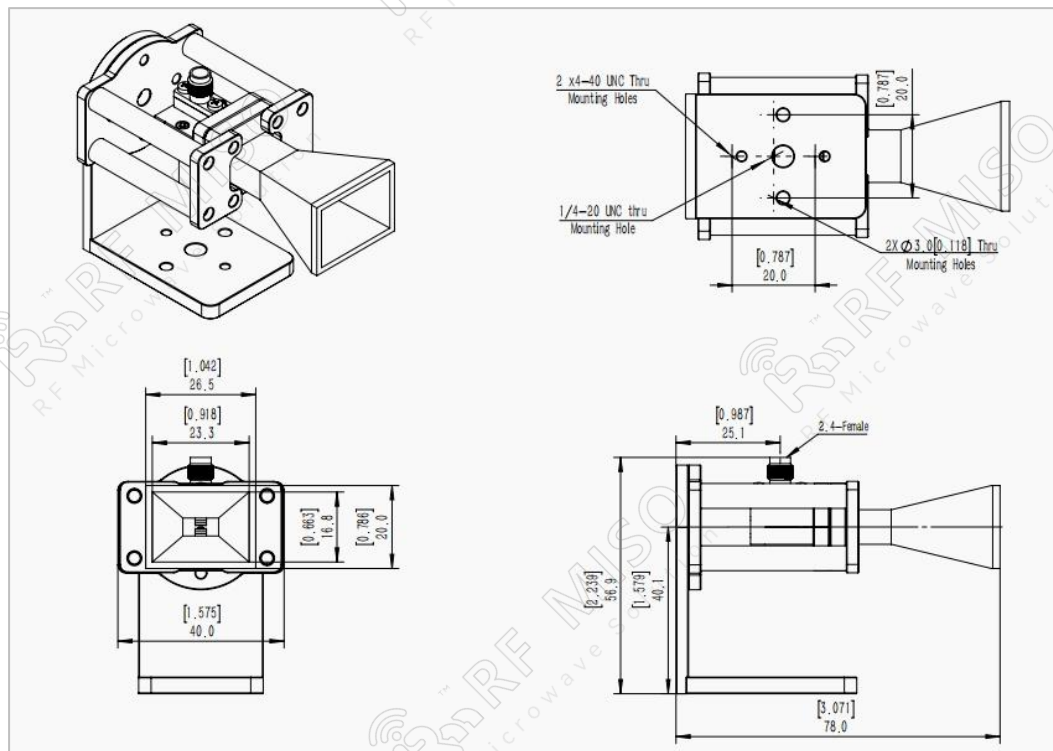

Mechanical Drawing with Rotating L-type Mounting Bracket (P/N: RM-SGHA34-15CR)

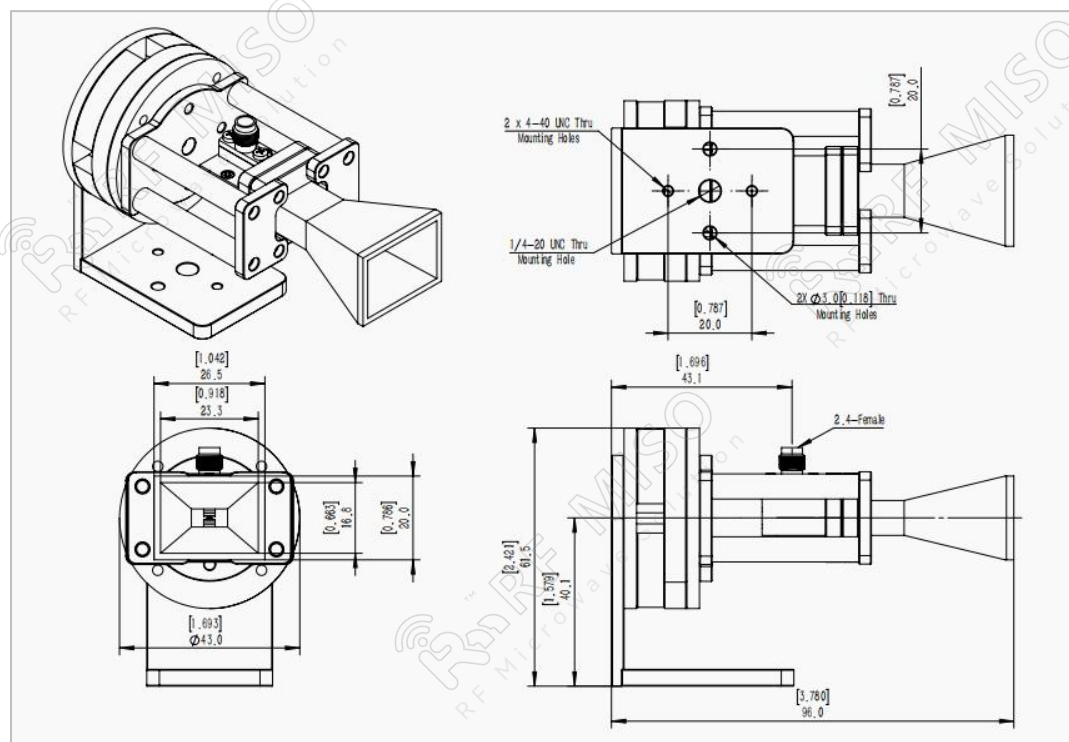


Standard Gain Horn Antenna
15dBi Typ. Gain, 21.7-33 GHz Frequency Range




Standard Gain Horn Antenna Data Sheet

RM-SGHA34-15

Mechanical Drawing with Original I-type Mounting Bracket (P/N: RM-SGHA34-10CI)

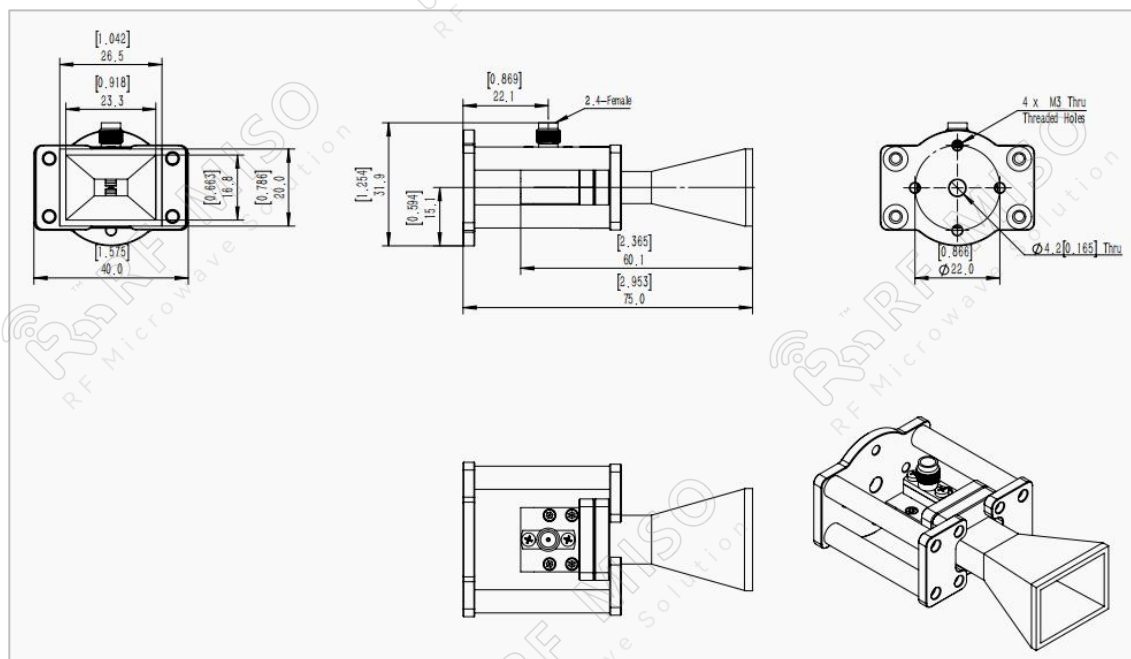

VSWR

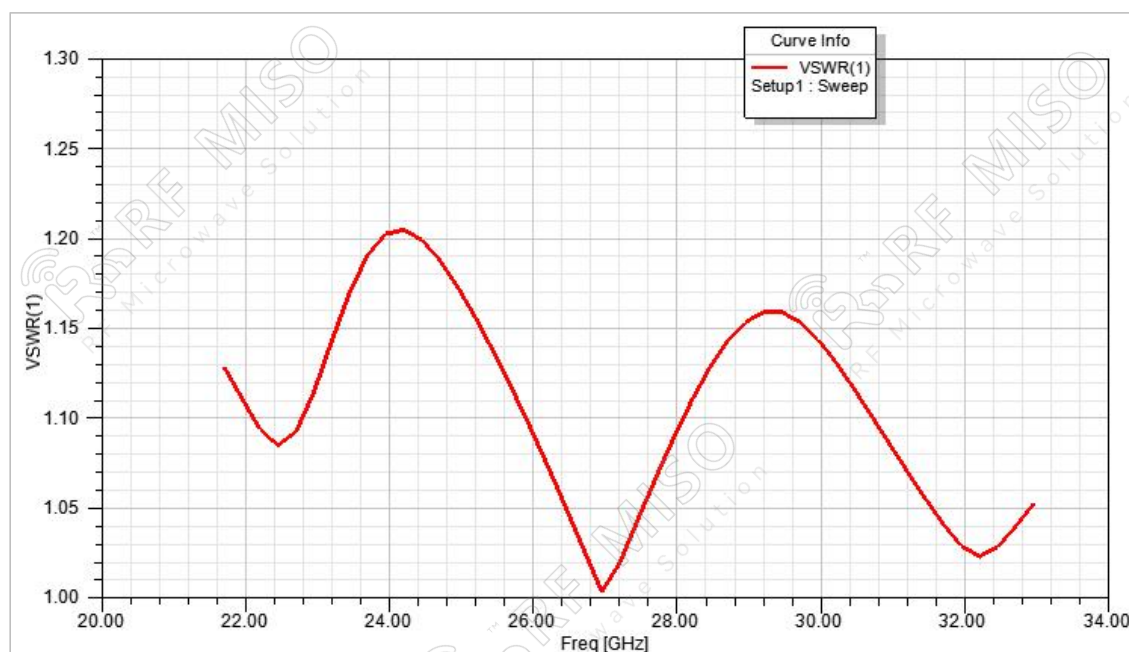


Standard Gain Horn Antenna
15dBi Typ. Gain, 21.7-33 GHz Frequency Range




Standard Gain Horn Antenna Data Sheet

RM-SGHA34-15

Gain

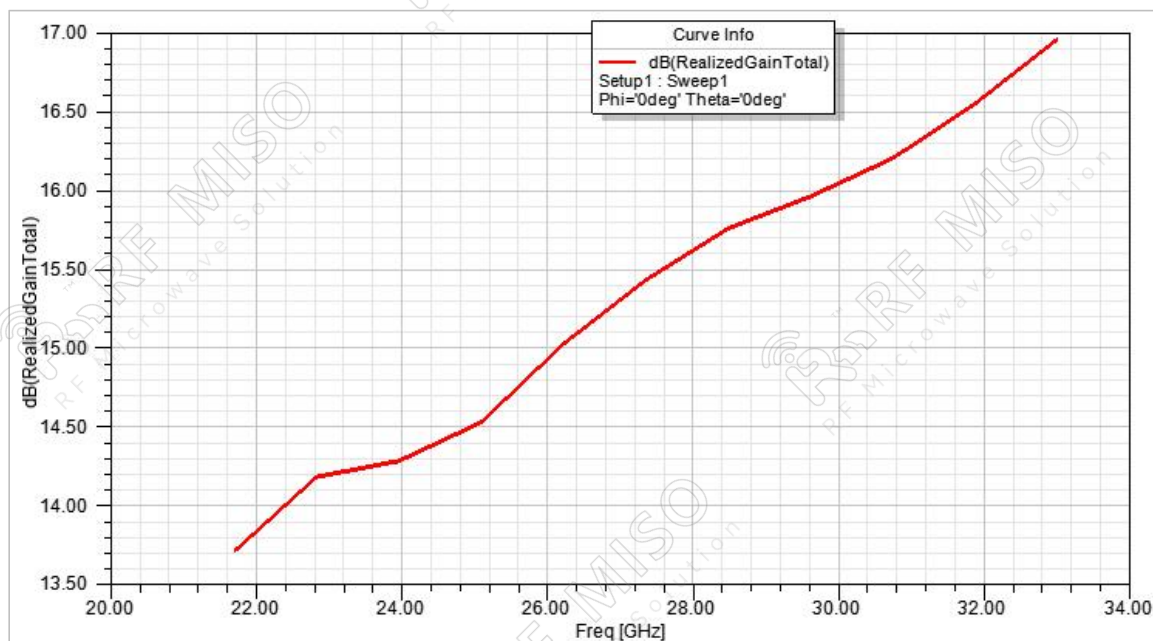

Gain Pattern E-plane

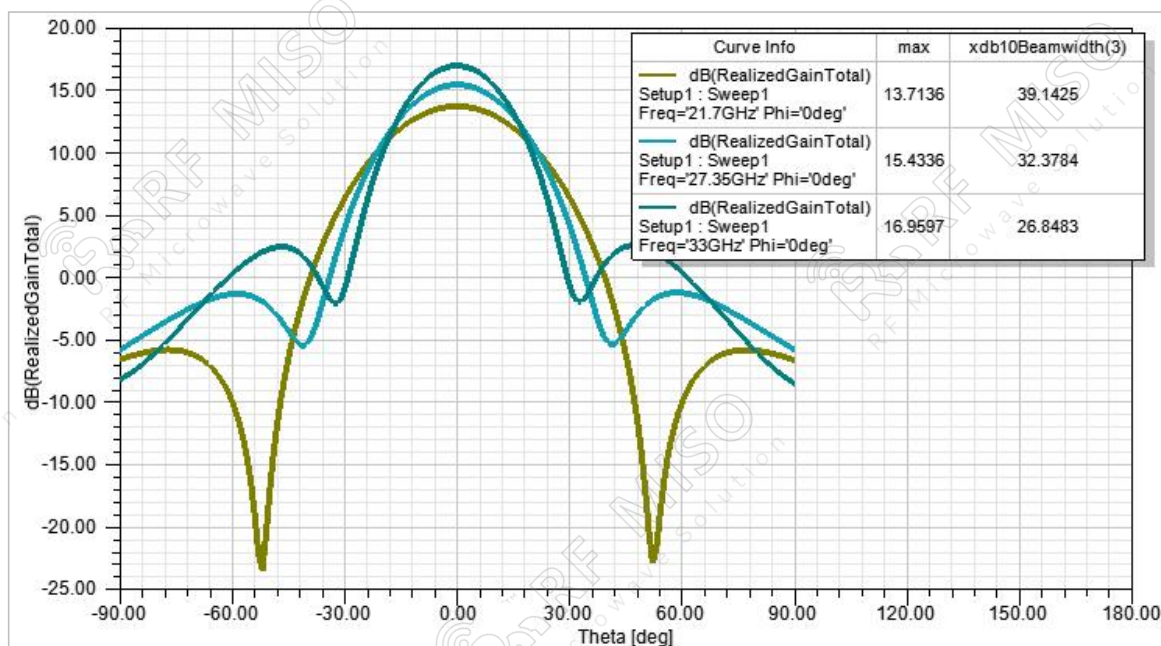




Standard Gain Horn Antenna Data Sheet

RM-SGHA34-15

Gain Pattern H-plane

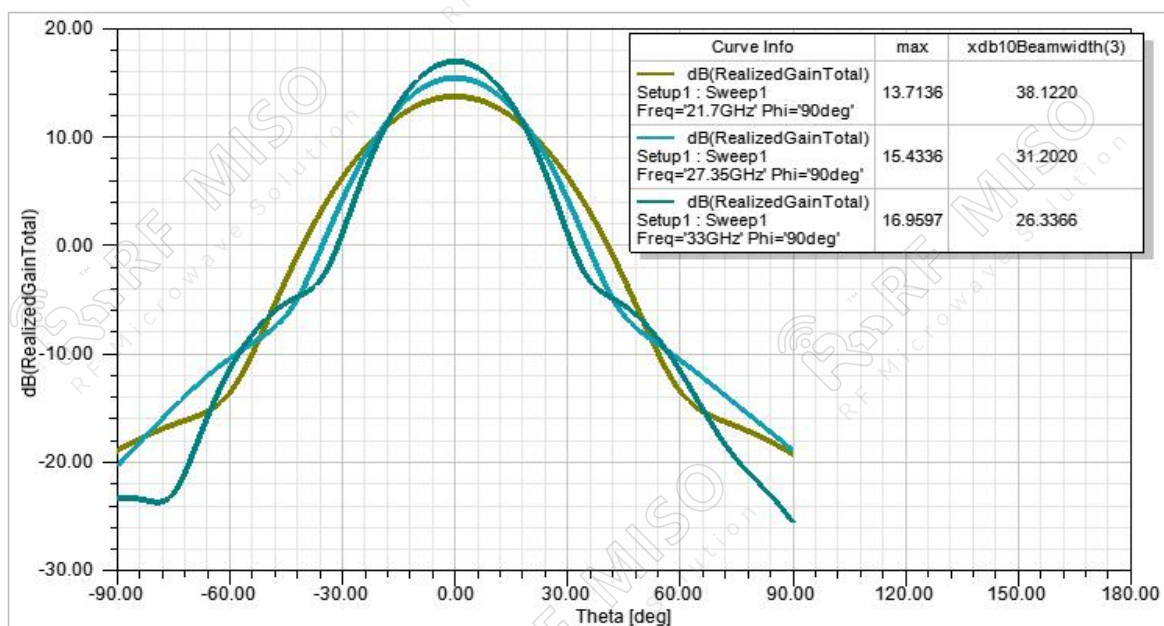

① **Rotating L-type bracket:** The rotating bracket is used for antenna polarization adjustment, and the tooling integrated with the bracket can precisely adjust the polarization directions of 0° , 45° , and 90° to ensure the accuracy and consistency of the calibration results.

Note:

- If the data presented is simulated. Actual data may vary unit to unit, slightly.
- Any foreign objects in the wave-guide will cause performance degradation and possible device damage.
- We can customize antennas according to your specific needs.