

*Slotted Waveguide Antenna*  
*20dBi Min. Gain, 8.6-9.6GHz Frequency Range*

**Slot Waveguide Antenna Data**

**RM-SWA810-20**

**Features**

- Ideal for Communication and Radar
- Low VSWR
- Small Size and Light Weight
- High Gain
- Linear Polarization
- Coaxial Connector Optional

**Specifications**


<b>RM-SWA810-20</b>		
Parameters	Typical	Units
Frequency Range	8.6-9.6	GHz
Gain	>20	dBi
VSWR	1.5 Typ.	
Polarization	Linear	
3dB Bandwidth	≥20*7	°
Material	Al	
Treatment	Colored Conductive Oxidation	
Size	205.7*77.7*48.8	mm
Weight	1.052	Kg
Power Handling,CW	50	W

Slotted Waveguide Antenna  
20dBi Min. Gain, 8.6-9.6GHz Frequency Range


Slot Waveguide Antenna Data

RM-SWA810-20

Outline Drawing

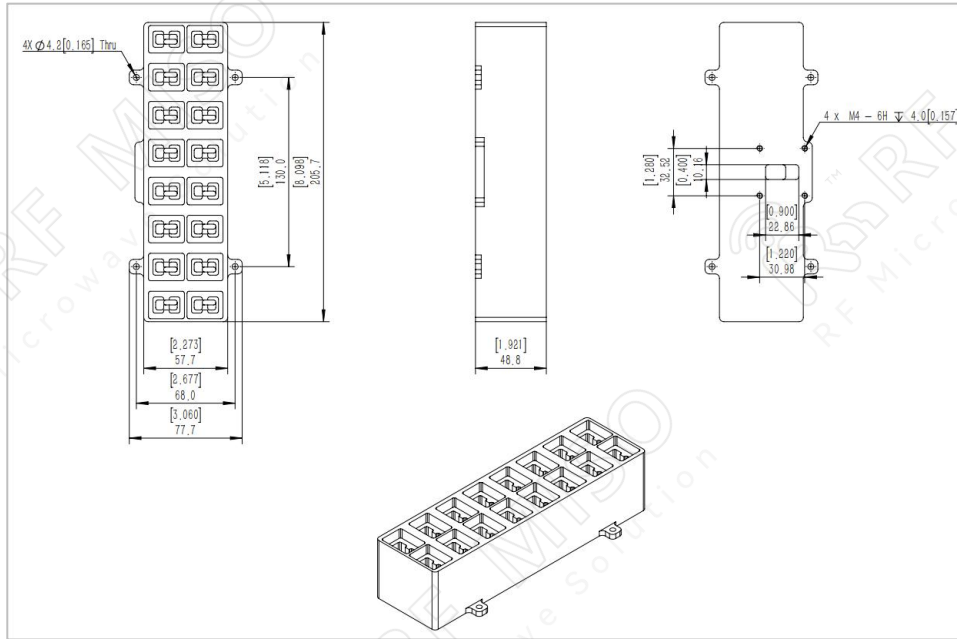

Outline Drawing with N-Female P/N: RM-SWA810-20N

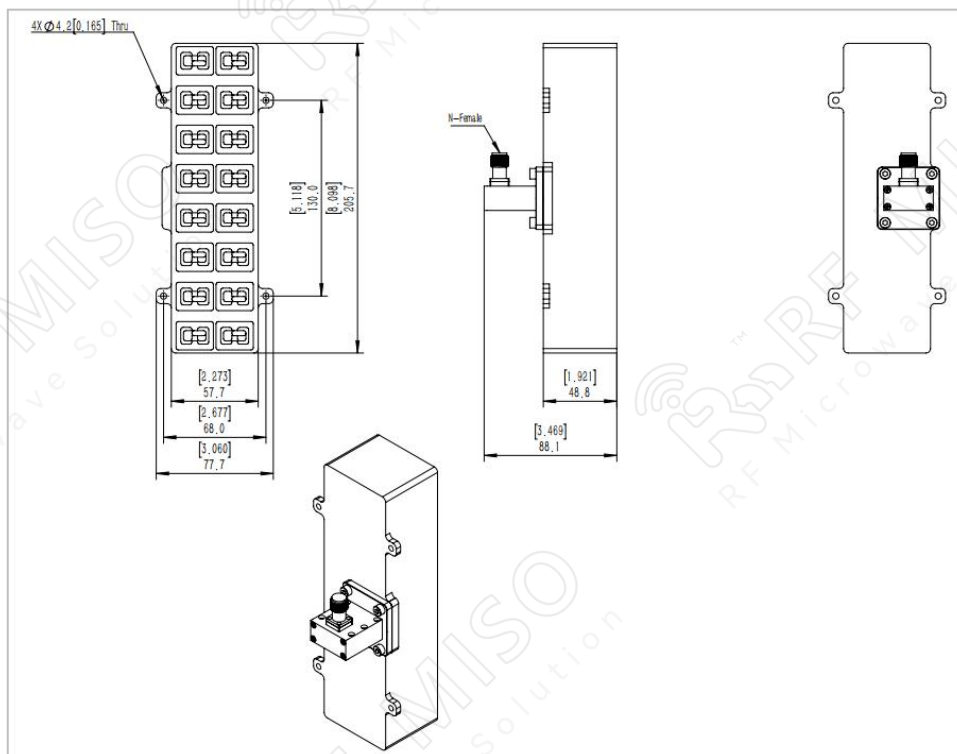



Slotted Waveguide Antenna  
20dBi Min. Gain, 8.6-9.6GHz Frequency Range

Slot Waveguide Antenna Data

RM-SWA810-20

Simulation Data

VSWR

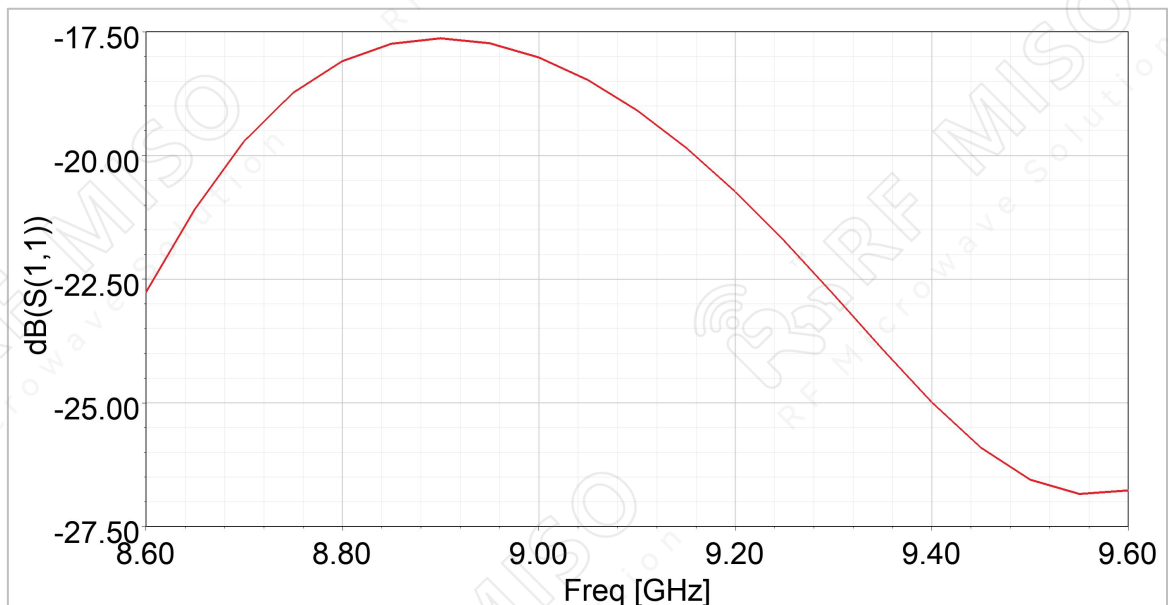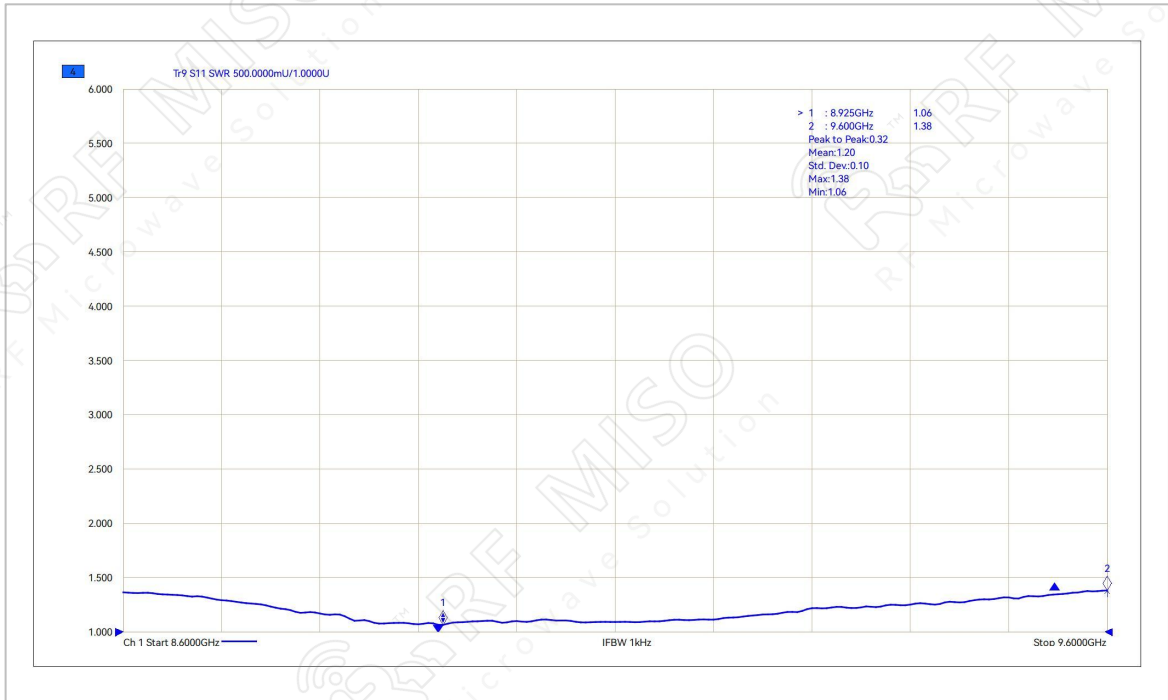

Slotted Waveguide Antenna  
20dBi Min. Gain, 8.6-9.6GHz Frequency Range

Slot Waveguide Antenna Data

RM-SWA810-20

Gain Pattern

