


Waveguide to Coaxial Adapter Date Sheet

RM-WCA3238-5

Specifications

RM-WCA3238-5		
Item	Specification	Units
Frequency Range	32-38	GHz
Gain	5 Typ.	dBi
VSWR	<2	
Cross polarization	65 Typ.	dB
Polarization Mode	Linear-polarized	
Connector	2.92mm-F	
Material	Al	
Size(L*W*H)	26.4*13.2*12.69(±5)	mm
Weight	0.003	kg


Waveguide to Coaxial Adapter
32-38GHz Frequency Range




Waveguide to Coaxial Adapter Date Sheet

RM-WCA3238-5

Outline Drawing

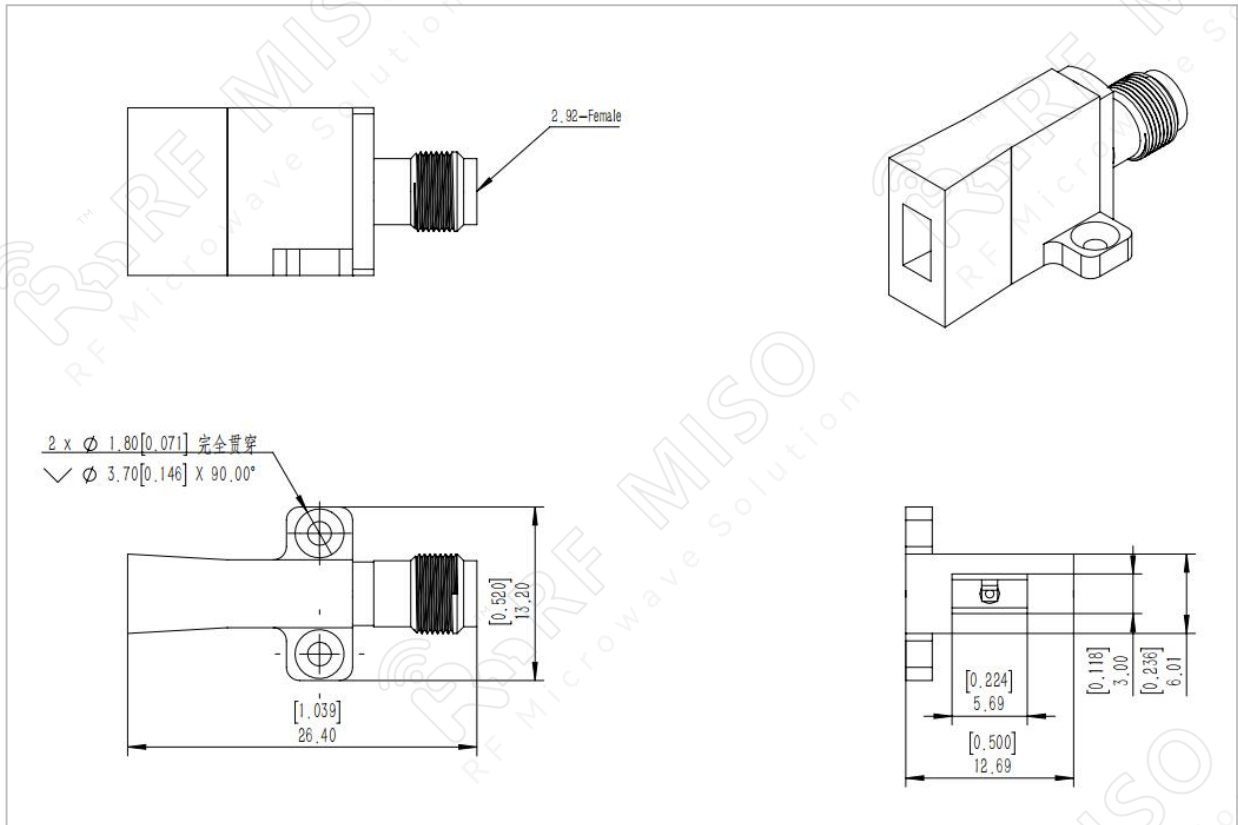




Waveguide to Coaxial Adapter Date Sheet


RM-WCA3238-5


Simulation Data

VSWR

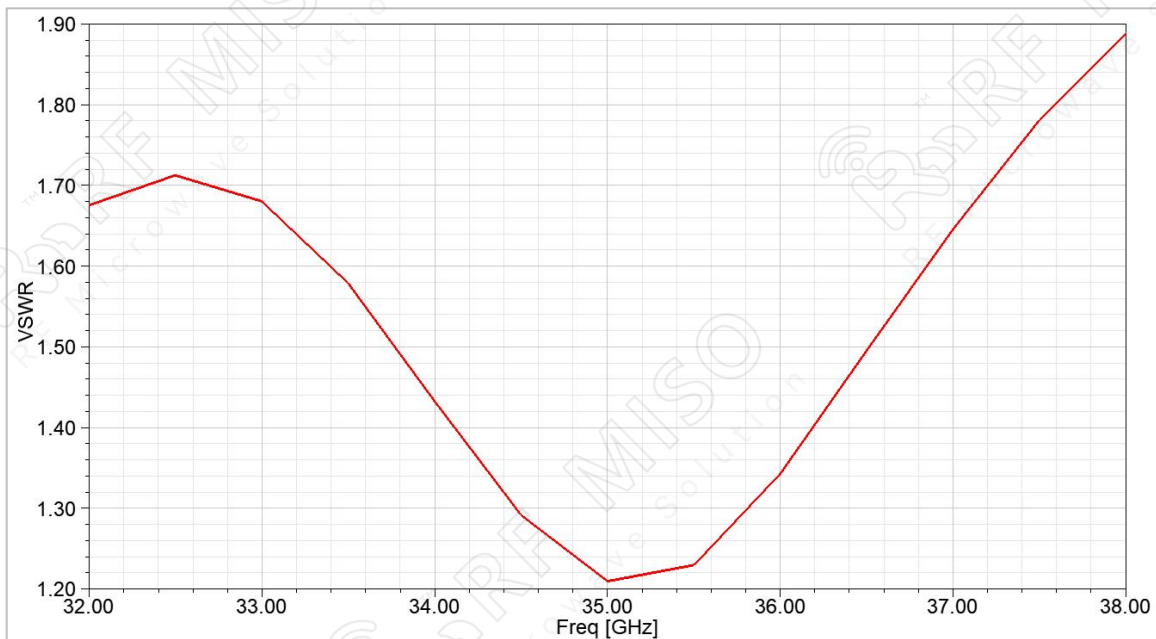

Gain

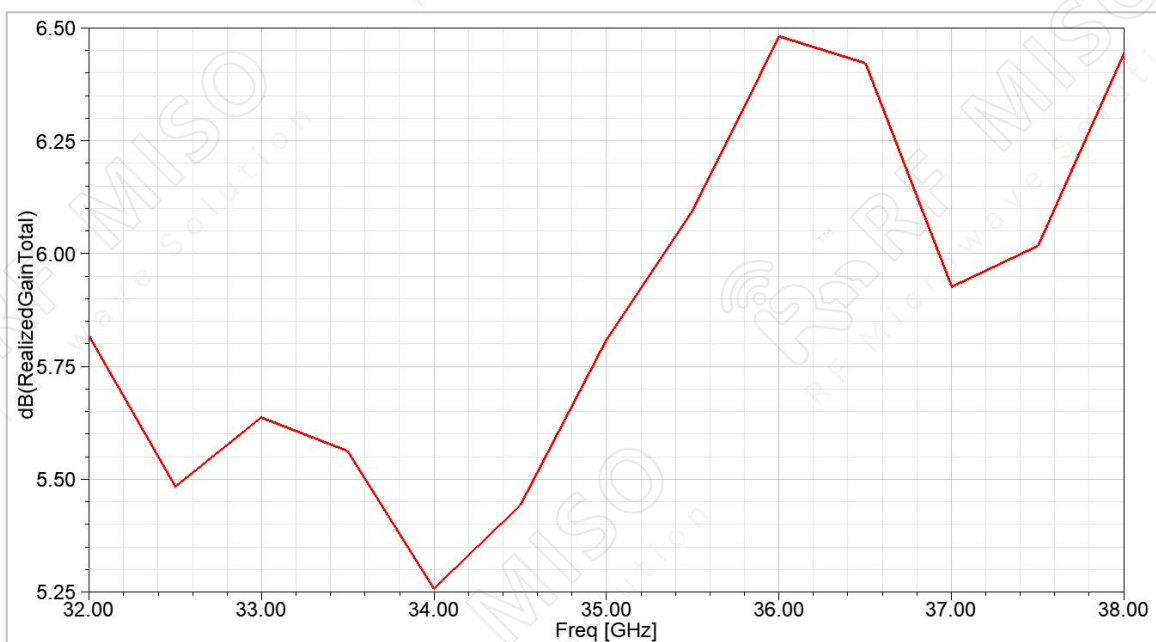




Waveguide to Coaxial Adapter
32-38GHz Frequency Range

Waveguide to Coaxial Adapter Date Sheet


RM-WCA3238-5


Cross Polarization

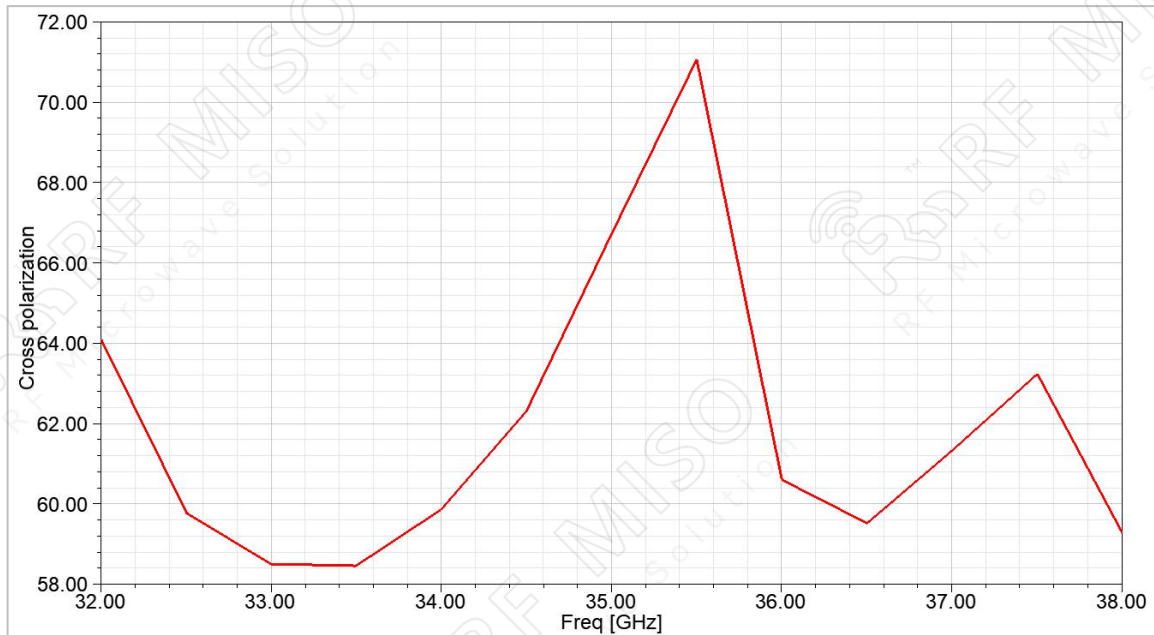

Pattern

33 GHz

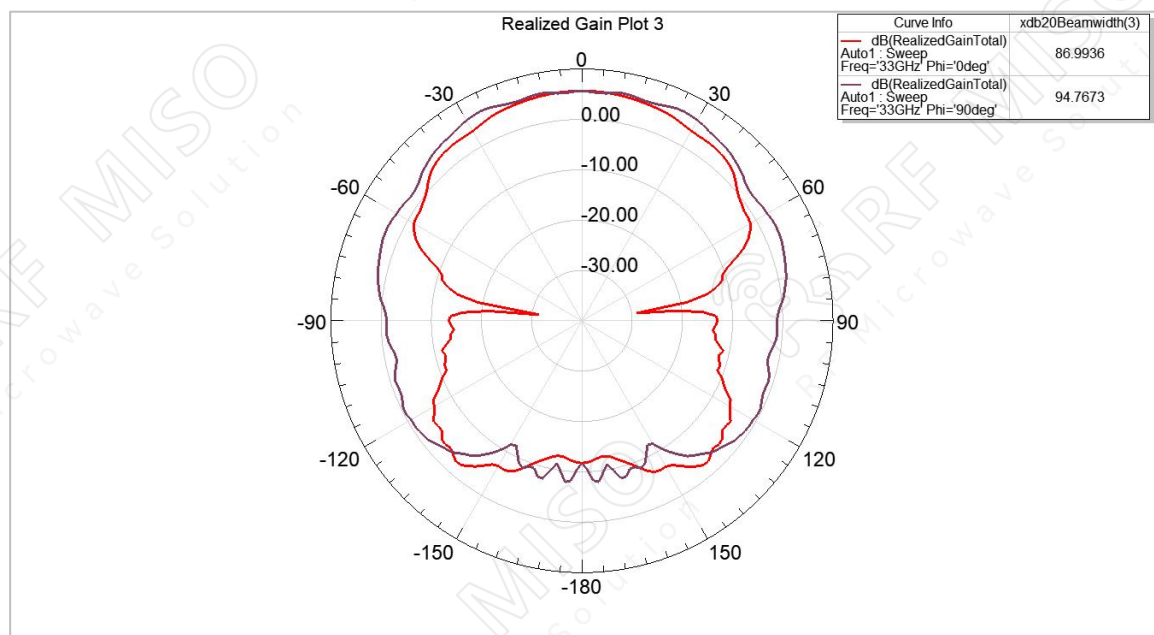




Waveguide to Coaxial Adapter Date Sheet

RM-WCA3238-5

35 GHz

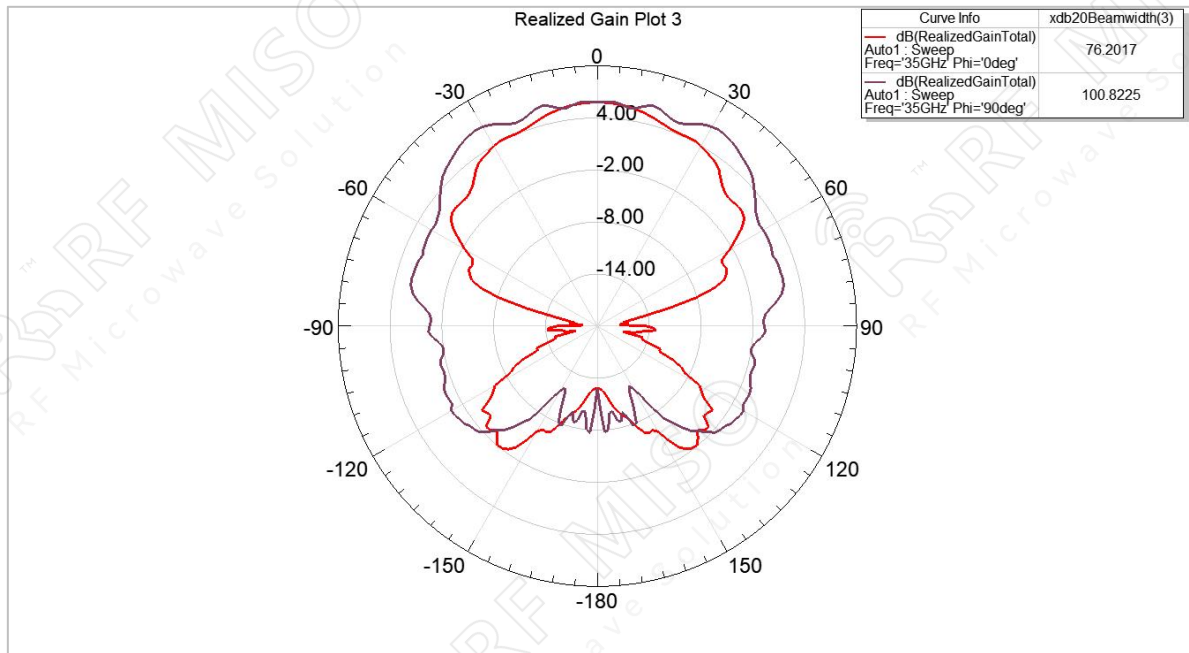

37 GHz

