

*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*



Biconical Antenna Data Sheet

RM-BCA18-2

Descriptions

RF MISO's **Model RM-BCA18-2** is a linear polarization biconical antenna that operates from 1-8GHz. The antenna offers a gain 2 dBi Typ. and low VSWR 1.5:1 with SMA-Female connector. It covers L, S, and C bands, suitable for multi-band scenarios.

Specifications

RM-BCA18-2		
Parameters	Typical	Units
Frequency Range	1-8	GHz
Gain	2 Typ.	dBi
VSWR	1.5 Typ.	
Polarization	Linear	
Connector	SMA-Female	
Body Material	Al	
Size	120*Ø120	mm
Weight	0.918	Kg
Power Handling,CW	50	W
Power Handling,Peak	100	W

*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*




Biconical Antenna Data Sheet

RM-BCA18-2

Outline Drawing

N Type connector is available, please contact RF Miso

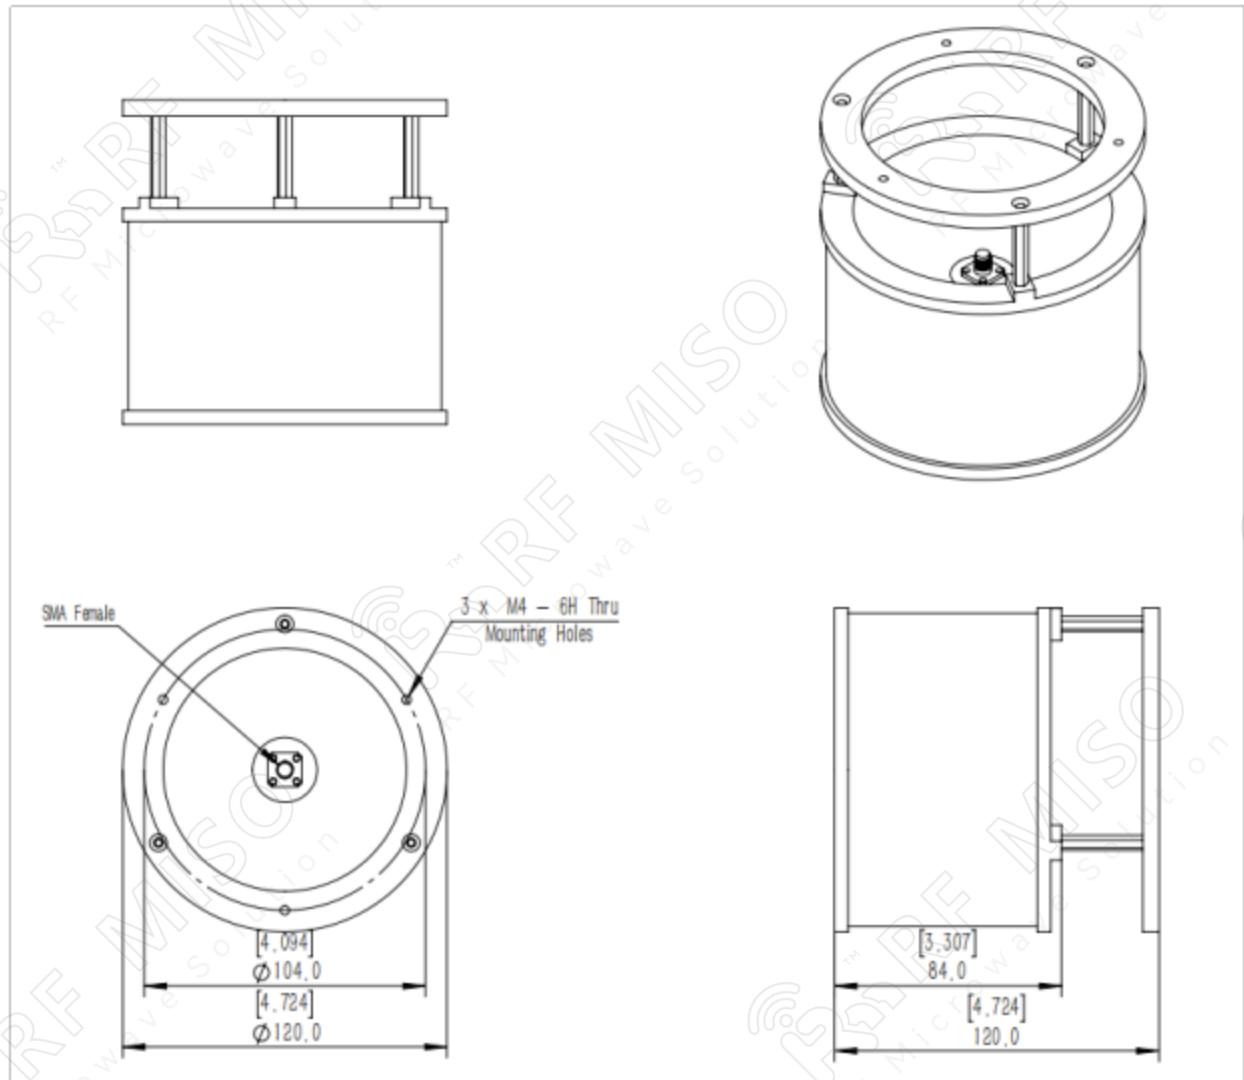

*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*




Biconical Antenna Data Sheet


RM-BCA18-2

Simulation Data

VSWR

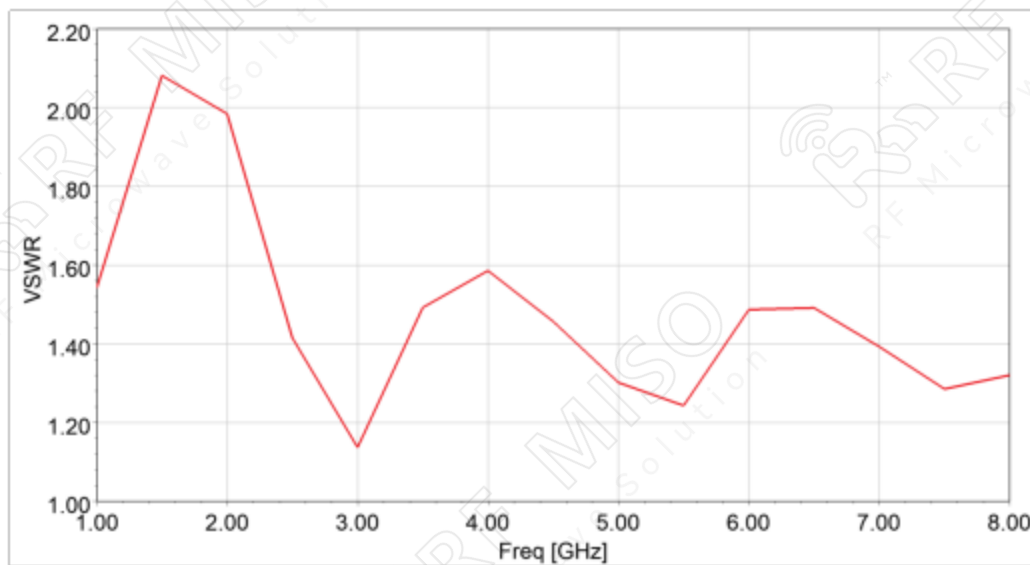

Gain

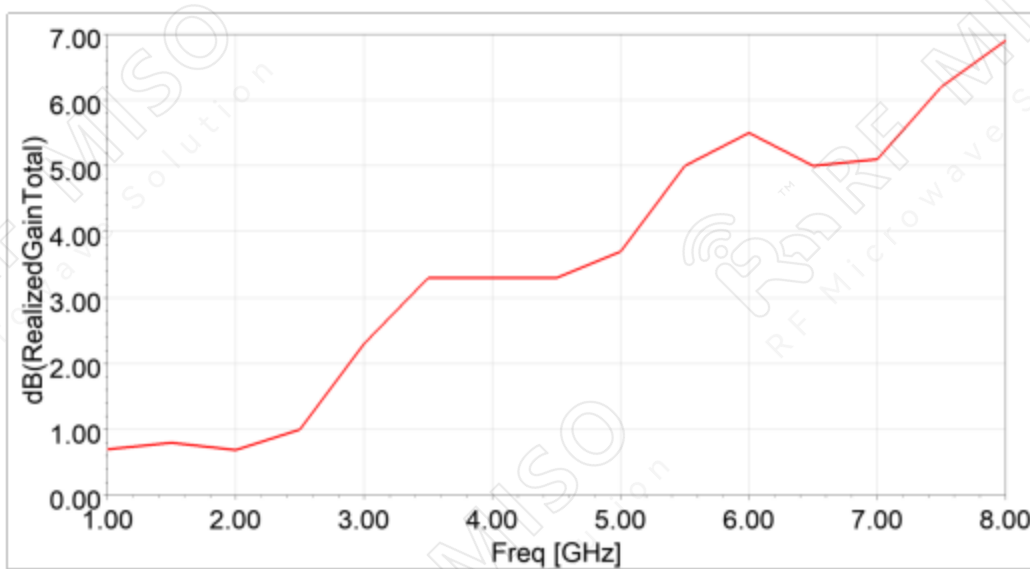

*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*




Biconical Antenna Data Sheet


RM-BCA18-2

Pattern

1GHz

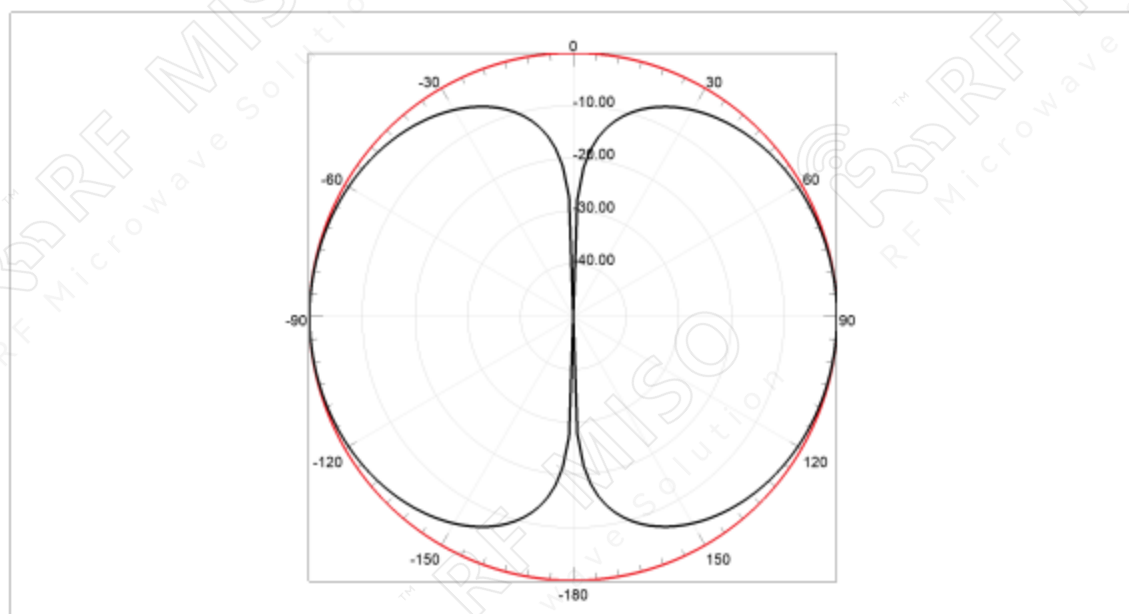

2GHz

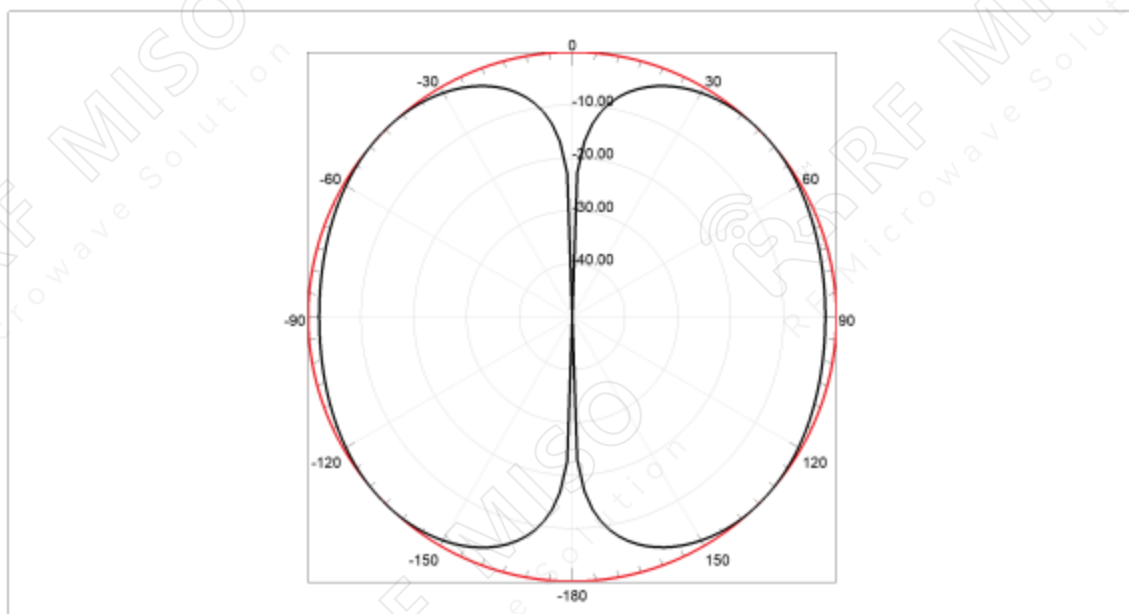


*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*




Biconical Antenna Data Sheet

RM-BCA18-2

3GHz

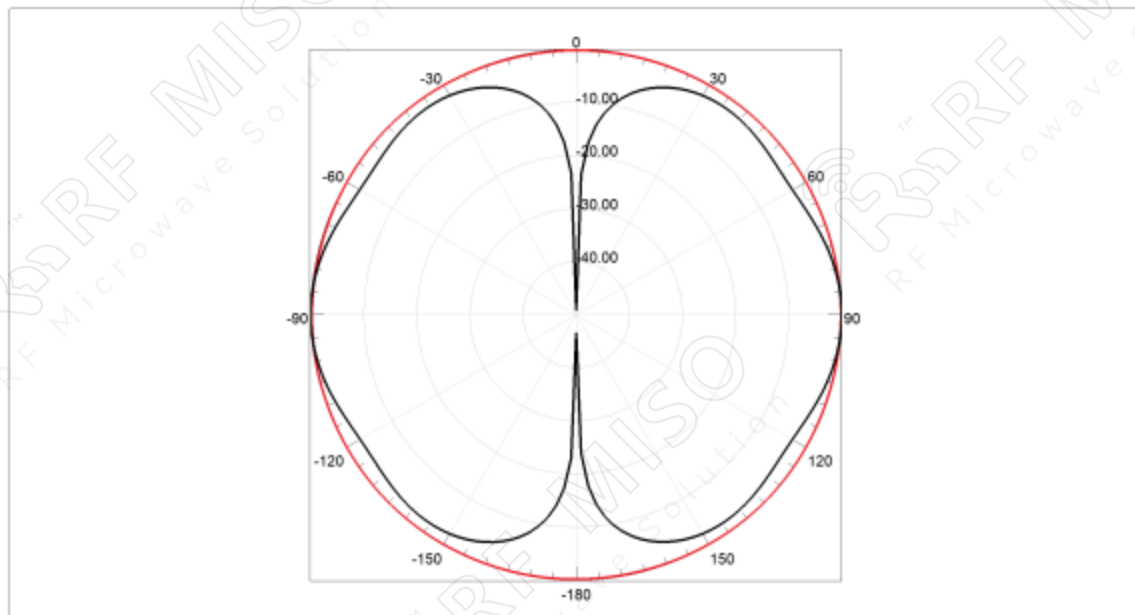

4GHz

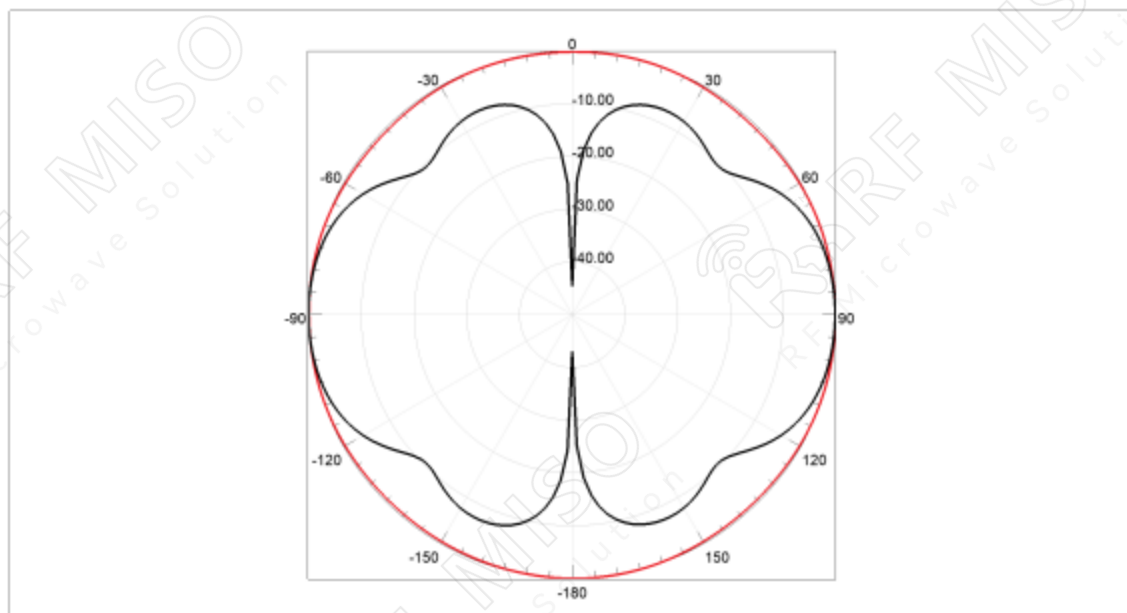


*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*




Biconical Antenna Data Sheet

RM-BCA18-2

5GHz

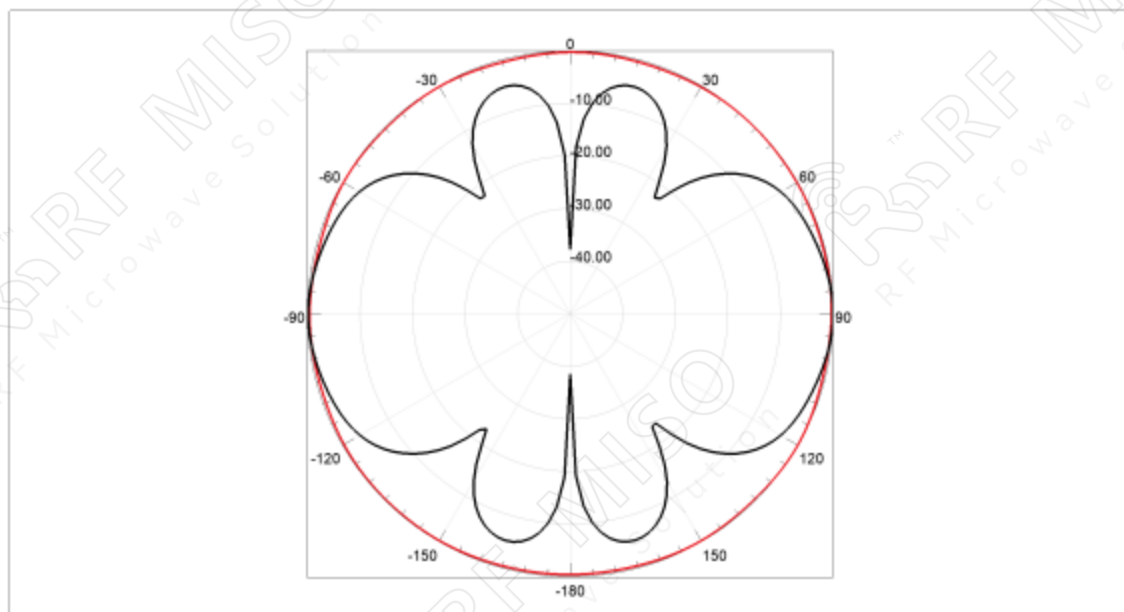

6GHz

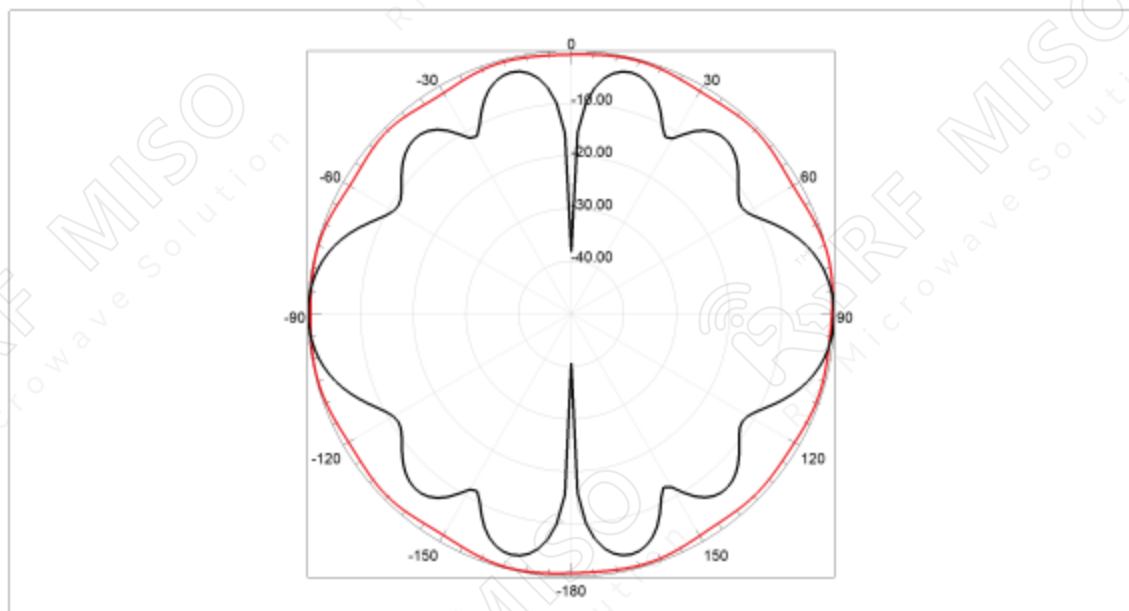


*Biconical Antenna 1-8 GHz Frequency Range
2 dBi Typ. Gain*



Biconical Antenna Data Sheet

RM-BCA18-2

7GHz

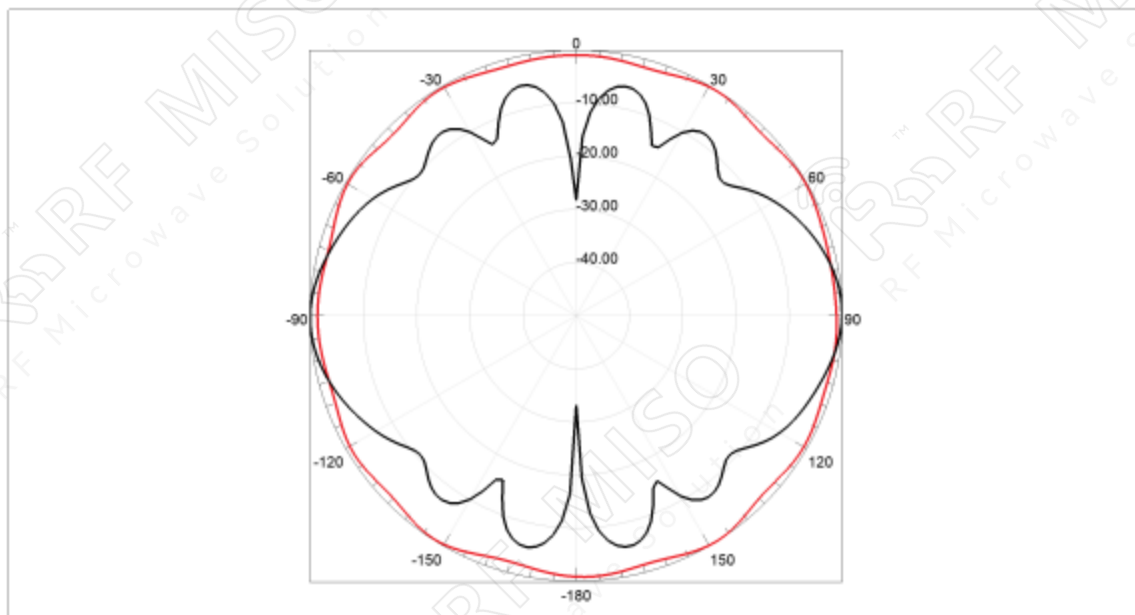

8GH

